Asphalt Bitumen Patch	ning   SAFE WORK METHO	D STATEMENT (SWMS)	
TASK	OR ACTIVITY: Asphalt Bitumen P	atching	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E Jil:	
THIS SAFE WORK METHOD	STATEMENT IS APPRO		
Under the Work Health and Safety Regulation (WHS Regulation), a person conduct the proposed work starts.	cting a business or under the (PC - U is	required to entry e that a safe work method s	tatement (SWMS) is prepared before
Full Name:			
Signature:	NK	Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitoring a	poliance the VMS a well as review	s and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS MAN PHAVE THE FOLLOWING COMMUNICATED	NALE OF ALL RELEVANT PERSONNE EVELOPMENT AND APPROVAL OF	EL WHO HAVE BEEN CONSULTED AND CO THIS SWMS	DMMUNICATED TO IN THE
Safety meetings or toolbox talks will be sched ed in according with a gislative requirements to first identify any site hazards, such a companie hicas those hazards and then to further take steps to either eliminate or control each hazard.			
If an incident or a near miss occurs, all work must stop an ately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			



CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH-RISK CONSTRUC	
☐ involves a risk of a person falling more than 2 meters	I is carried out on or near pressurised gas mains or piping
□ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	□ is carried out on or near energised electrical installations or services
□ involves demolition of an element related to the physical integ. Y of a sucture	$\square$ is carried out in an area that may have a contaminated or flammable atmosphere
□ involves, or is likely to involve, disturbing asb	☐ involves tilt-up or precast concrete
involves structural alteration or repair that quires terminary supart to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
□ is carried out in or near a confined space	$\Box$ is carried out in an area of a workplace where there is any movement of powered mobile plant
is carried out in/near a shaft or trench deeper that tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
☐ is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	RY OR EQUIPMENT NEARBY



RISK MATRIX										
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE			HEIRARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	ACTION		Elimination Remove the hazard.	
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review befor work starts.		Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.		Isolate People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and k⊾ records		Engineering Isolate the hazard.	
INTE       LOW       LOW       MODERATE       HIGH       HIGH       LOW       Reseconde       Isolate the flazald.         Notes on Hierarchy of Controls:       Elimination methods are the most effective and preferre usen contribute a hazard. Substitution is the second most effective method of controlling a hazard. Engineering by isolation is the tractost endiver, while Administrative Controls by changing the work is the fourth most effective method. PPE (Personal Protective Equipment), the least effective       PPE       PPE										

						TIVE EQUIPM					
		Select the ap	propriate PPL	abo, ruitab	i or the equi	oment used or	the job task	being perform	ned (if applica	able).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION		P ECTION	R⊾ ⇒PIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE Required:											
	Permit or Licenses Requirements					Mandatory Qualifications and Training					



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Exposure to hazardous materials, Slips and trips	2М	<ul> <li>Proper training and education on handling or cardous materials, including bitumen and other chemicals used in the patching process.</li> <li>Establishing clear work zones for the asphalteneous patching area to avoid accidentally entering hazardous areas.</li> <li>Regular inspection and main nance of tools and on upper to ensure their safe operation and prevent unexpected failures.</li> <li>Providing approvate pel pal projective equipment (PPE) such as gloves, safety goggles, hard hats, and high visitely vests for worken.</li> <li>Implementing apper usage and disp all methods for all hazardous materials, ensuring they are kept away on lightly on uses and unauthorised personnel.</li> <li>Enforting, getrict hor moking policy in the work area to minimise the risk of fire or explosion from flamma is connicals.</li> <li>Installin barry or temporary fencing around the worksite to prevent unauthorised access and ensure on train 1 personel enter the area.</li> <li>Providing non-slip and comfortable footwear for workers, helping to prevent accidental slips and falls on bitume or uneven surfaces.</li> <li>Clearly marking wet or slippery areas with hazard cones, signs, or caution tape to alert workers to potential risks.</li> <li>Conducting regular hazard assessments and updating risk control measures when new hazards are identified during the patching process.</li> <li>Implementing a strict housekeeping policy including regular cleaning and tidying of the workspace to prevent buildup of hazardous substances and minimise trip hazards.</li> <li>Encouraging open communication between workers and supervisors to report any unsafe conditions or near-miss incidents for rapid remediation.</li> <li>Utilising a buddy system or team approach for tasks involving hazardous materials or difficult terrain, providing additional support and vigilance against potential hazards.</li> </ul>	1L
2. Traffic Control Setup	Vehicle strikes, Fatigue	ЗН	<ul> <li>Proper Planning: Before beginning the Asphalt Bitumen Patching work, ensure a detailed traffic management plan is in place to minimise the risks associated with vehicle strikes and workers' fatigue.</li> <li>Clear Signage: Place visible and clear signs in and around the worksite to inform motorists and pedestrians about the ongoing construction work and any possible diversions or changes in the traffic flow.</li> </ul>	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Trained Traffic Controllers: Employ trained traffic controllers wearing high-visibility clothing to control traffic flow and direct vehicles safely around the workspace.	
			- Barricades/Barriers: Set up barricades or barrierence create a physical separation between working zones and traffic flow to prevent vehicle intrusion onto the worksite.	
			- Regular Communication: Ensure proper or munications, tween team members using two-way radios or mobile devices, empowering them to promove represent any hazards or changing conditions regarding traffic control.	
			- Vehicle Maintenance: Regularly check and main on all vehicles used on-site, including inspection of brakes, lights, and tires to reduce the risk of accide, advecting mechanical failure.	
			- Adequate Lighting Lass, there, appropriate lighting, especially during night shifts or areas with low visibility, to en', ce worke safet, and reduce the chances of vehicle strikes.	
			- Speed Limit, mpose ar phonitor an explate speed limits for both construction vehicles and regular traffic our the skitch minimise the sk of collisions.	
			- Work Revision as a Breaks: Implement work rotation schedules and sufficient breaks to combat worker fatigue and ing that use responsible for traffic control remain alert and focused at all times.	
			- Emergincy hosponse clan: Develop and communicate an emergency response plan to handle any pidents elated whicle strikes or other traffic hazards, ensuring that workers promptly react and manine to hergenues in a controlled and efficient manner.	
			efore commencing work, conduct a thorough visual inspection of all electrical equipment and cords to entry there are no frayed wires or damaged insulation.	
			Follow proper lockout/tagout procedures in case an equipment malfunction is detected to prevent inadvertent energising when working on the equipment.	
			- Use Ground-Fault Circuit Interrupters (GFCIs) with electrical power outlets as added protection against accidental electrocutions.	
			- Keep water, dirt, and other contaminants away from live electrical parts to reduce the risk of equipment failure and electrocution.	
3. Equipment Inspection	Electrocution, Falls from height	ЗH	- Ensure that all workers using ladders or other height-access equipment have completed appropriate training in working at heights.	1L
			<ul> <li>Require employees to wear Personal Protective Equipment (PPE) including insulated gloves, safety glasses or goggles, and high visibility clothing when working with electrically powered equipment or at heights.</li> </ul>	
			- Implement edge protection measures such as guardrails or barriers around open edges or unprotected sides to prevent falls from height.	
			- Ensure that all lifting equipment, such as ladders or scaffolding, has been regularly inspected and is in good working condition.	
			- Establish a secure working platform or mobile elevated work platforms (MEWPs) with fall prevention or arrest system for safe access to elevated work locations.	




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Exercise the 3-point contact method when mounting and dismounting ladders or other height-access equipment to maintain stability and avoid falls.	
			- Designate a competent person to carry out regulated uppendix quipment maintenance and periodic inspections, ensuring all issues are addressed promptly.	
			- Communicate and enforce safe work practices among a ployees, including responsible use and storage of tools, cables, and other equipment is minimate hazards.	
			- Perform a hazard assessment before starting to identify a v new risks that may have arisen since the last worksite evaluation a supdate control modures acroangly.	
			- Hold regular safety briefings a toolbox talks to return the importance of adhering to prescribed safety measures for any ters in lived in asphalt bitumen patching.	
4. Cleaning Work Area	Eye injuries, Cuts a second	PM		1L




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Removal of Existing Asphalt	Manual handling in, and use exposure	ЗН		2M




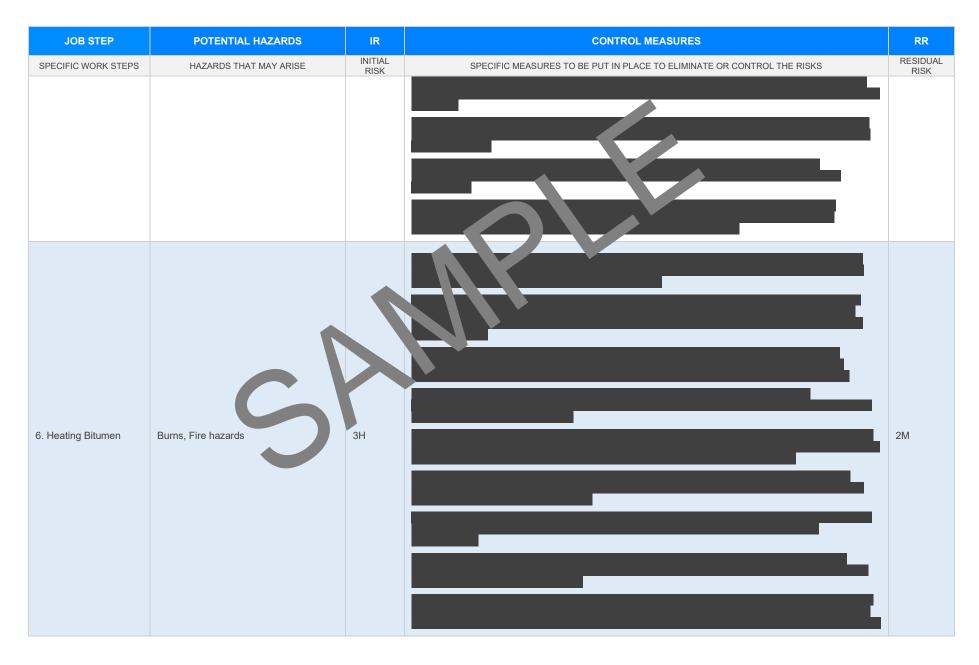



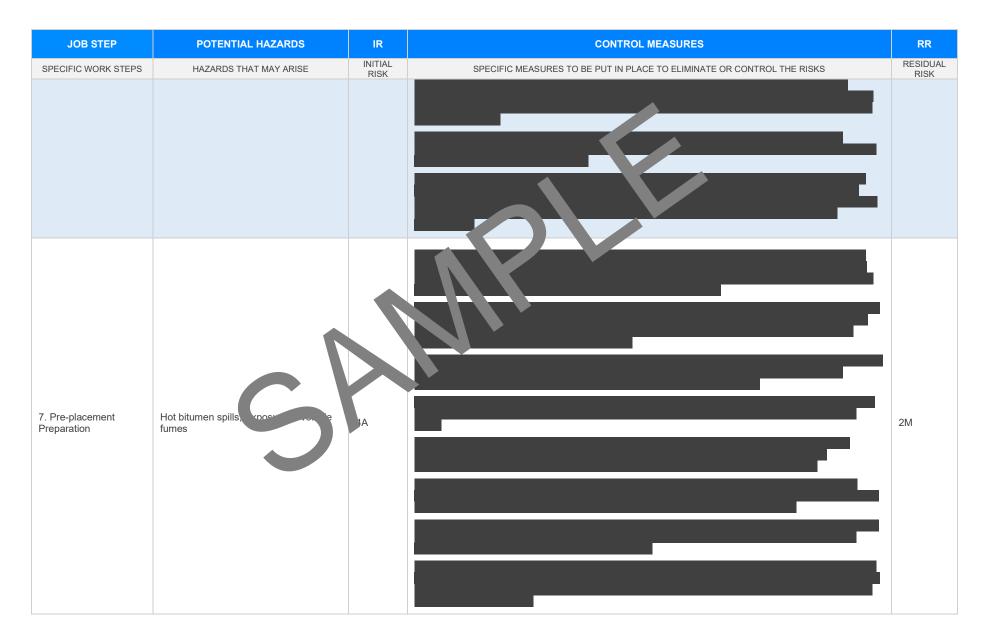




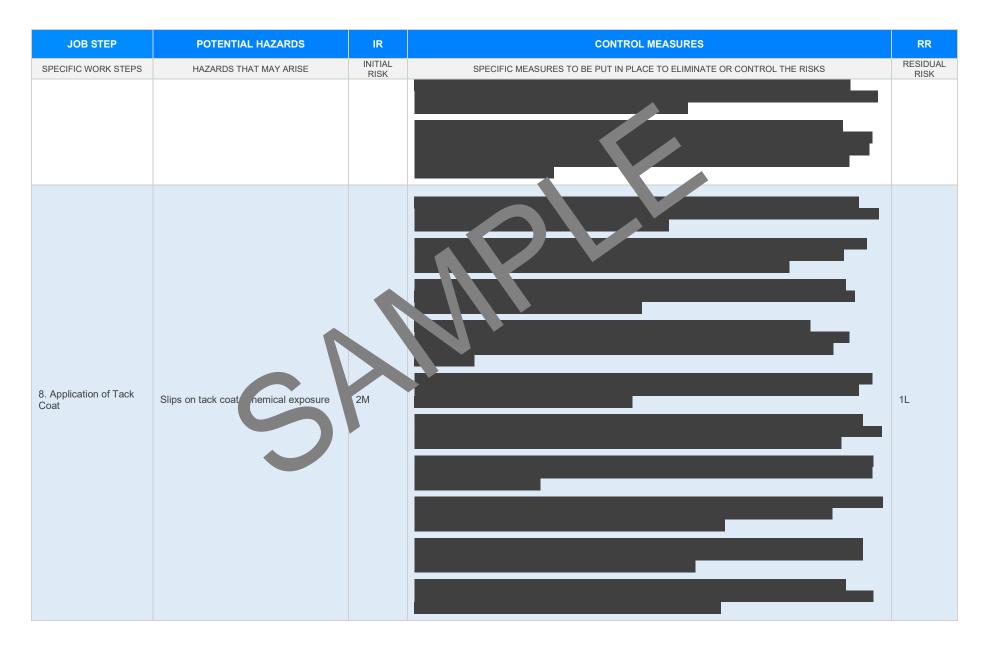



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
9. Laying Asphalt	Back strain, Pinch Dints	ЗН		1L



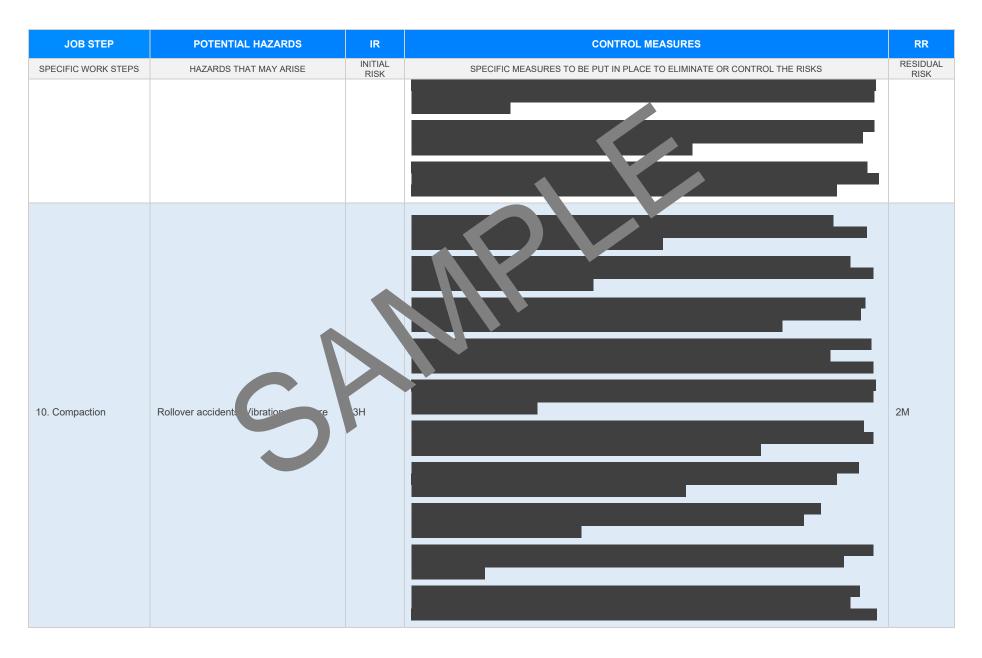



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
11. Finishing and Quality Check	Trips over loose material, Exposure to sunlight	2М		
12. Cleanup and Demobilization	Disposal of waste materials, Manual handling injuries	2M		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	S			

Version 2.5



#### **EMERGENCY RESPONSE – CALL 000 FOR EMERGENCIES**

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REF	ERENCES
RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISL	ATIVE REFERENCES ANY STATE AT ARE NOT APPLICABLE
Queensland & Australian Capital Territory Work Health and Safety Act 2011 Work Health and Safety Regulations 2011 Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice	Victoria Occupational Health au Safety Act 204 Occupational Health and onfety or gulations 2017 Legistron VIC: <u>https://www.worksafe.vic.gov.au/occupational-health-and-safety-act-and- gulations</u> of the solution of the state of the solution of the solutio
New South Wales         Work Health and Safety Act 2011         Work Health and Safety Regulations 2017         Legislation NSW: <a href="https://www.safework.nsw.gov.au/legal-obligations/legislative">https://www.safework.nsw.gov.au/legal-obligations/legislative</a> Codes of Practice NSW: <a href="https://www.safework.nsw.gov.au/resource-library/lis">https://www.safework.nsw.gov.au/legal-obligations/legislative</a>	Western Australia Work Health and Safety Act 2020 Work Health and Safety Regulations 2022 Legislation Western Australia: <u>https://www.commerce.wa.gov.au/worksafe/legislation</u> Codes of Practice WA: <u>https://www.commerce.wa.gov.au/worksafe/codes-practice</u>
Northern Territory Work Health and Safety (National Uniform Legislation) Act 2011 Work Health and Safety (National Uniform Legislation) Regulation 2011 Legislation NT: <u>https://worksafe.nt.gov.au/laws-and-compliance/worplace-provelaws</u> Codes of Practice NT: <u>https://worksafe.nt.gov.au/formediatestary.au/formedia</u>	Safe Work Australia Links Law and Regulation (All States): <u>https://www.safeworkaustralia.gov.au/law-and-regulation</u> Model Codes of Practice: <u>https://www.safeworkaustralia.gov.au/resources-publications/model- codes-of-practice</u>
South Australia Work Health and Safety Act 2012 (SA) Work Health and Safety Regulations 2012 (SA) Legislation for SA: <u>https://www.safework.sa.gov.au/resources/legislation</u> Codes of Practice for SA: <u>https://www.safework.sa.gov.au/work_aces/codes-of-practice#COPs</u> Tasmania Work Health and Safety Act 2012	<ul> <li>Model Codes of Practice</li> <li>Managing noise and preventing hearing loss at work</li> <li>Confined spaces</li> <li>Labelling of workplace hazardous chemicals</li> <li>Managing risks of hazardous chemicals in the workplace</li> <li>Welding processes</li> <li>First aid in the workplace</li> <li>Managing the risk of falls at workplaces</li> </ul>
Work Health and Safety Act 2012 Work Health and Safety (Transitional and Consequential Provisions) Act 2012 Work Health and Safety (Regulations 2012 Work Health and Safety (Transitional) Regulations 2012 Legislation for TAS: <u>https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations</u> Codes of Practice for TAS: <u>https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice</u>	<ul> <li>Hazardous manual tasks</li> <li>Managing the risk of falls in housing construction</li> <li>Managing electrical risks in the workplace</li> <li>Demolition work</li> <li>Excavation work</li> <li>Work health and safety consultation, cooperation and coordination</li> </ul>
Details of permits, licenses or access required by regulatory bodies (add or delete as required): - Permits from local council - Authorisation to commence work - Any required documents.	<ul> <li>Managing the work environment and facilities</li> <li>How to manage work health and safety risks</li> <li>Managing risks of plant in the workplace</li> <li>Construction work</li> </ul>



#### SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and gualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

#### SAFE WORK N THE ST ATEM ANT MONITORING AND REVIEW

d must reviewed (and

hav be sted by the operation

should be carried out in

The SWMS must be reviewed regularly to make sure it remains fective revised if necessary) if relevant control measures are revised. The viewn consultation with workers (including contractors htractors of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU must ensure that persons involved with the work are advised that a revision has been made and how they can acces he revised SWMS, including all persons who will need to change a work procedure or system as a region of the review are advised of the changes in a way that will enable them to implement their duties antly with the revised SWMS. All workers that will be involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- 1. Spot Checks.
- 2. Consultation with workers, contractors and sub-contractors.
- 3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies. followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							



#### SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS	
The company details have been entered, including the project name and address.			
All relevant personnel consulted during the development of the SWMS.			
Name, signature, position and date signed of the person approving the SWMS.			
Specific personnel and qualifications, experience is noted in the SWMS.			
Provides a step-by-step process of tasks required to carry out the activity or task.			
Adequate risk assessment of any identified hazards has been completed.	$\boxtimes$		
Foreseeable hazards are identified and documented for each step.	$\boxtimes$		
Any hazards listed in any site risk assessments have been added to the SWMS	$\boxtimes$		
SWMS initial risk (IR) column as well as residual risk (RR) column mpleted.	$\boxtimes$		
Check control measures added to the SWMS are the most effective selections	$\boxtimes$		
Responsible person is assigned and listed on the part the importation control measures.	$\boxtimes$		
Permit or licenses requirements specified, su as Hot Work, Electric Work, Work at Heights etc.	$\boxtimes$		
SWMS identifies plant and equipment to be use	$\boxtimes$		
Details of inspection checks required for any equipment listed protection on the SWMS.	$\boxtimes$		
Describes any mandatory qualifications, experience, and g or skills required to perform the work.	$\boxtimes$		
Applicable personal protective equipment is selected on the SWMS.	$\boxtimes$		
Reflects and documents any legislative references and/or Australian Standards.	$\boxtimes$		
Identifies any hazardous substances used with specific control measures in line with any SDS.	$\boxtimes$		
REVIEWED BY	DATE RE	DATE REVIEWED	
SIGNATURE	DATE COMPLETED		