



Asphalt Milling Machi	ne   SAFE WORK METHOD	STATEMENT (SWMS)	
TASK	OR ACTIVITY: Asphalt Milling M	achine	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E 111:	
THIS SAFE WORK METHOD	STATEMENT IS APPROVED BY	THE PCL OF THE ROJECT	
Under the Work Health and Safety Regulation (WHS Regulation), a person conduct the proposed work starts.	eting a business or under a (PC 1) is	required to en that a safe work method s	statement (SWMS) is prepared before
Full Name:			
Signature:	NY	Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitoring	opliance the VMS a vell as review	s and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS S VMS MY HAVE THE FOLLOWING COMMUNICATED	NA, 2 OF ALL RELEVANT PERSONNI EVELOPMENT AND APPROVAL OF	EL WHO HAVE BEEN CONSULTED AND CO	OMMUNICATED TO IN THE
Safety meetings or toolbox talks will be sched ed in accomply with gislative requirements to first identify any site hazards, hazards and then to further take steps to either eliminate or continuate hazard.			
If an incident or a near miss occurs, all work must sto, adately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			

Version 2.5 Authorised by Review # Date of Issue: Review Date: 1





CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH BIOK CONSTRUCTOR	NAME OF THE POLIT
ANY HIGH-RISK CONSTRUCTOR	N WC & BEIN C ARIED OUT
☐ involves a risk of a person falling more than 2 meters	is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	$\square$ is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical integral of a functure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing asb	☐ involves tilt-up or precast concrete
☐ involves structural alteration or repair that —quires term — v sup —rt to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
☐ is carried out in/near a shaft or trench deeper that. tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
$\square$ is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	Y OR EQUIPMENT NEARBY

Version 2.5 Authorised by Review # Date of Issue: Review Date: 2



RISK MATRIX										
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION	HEI	RARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	ACTION		Elimination Remove the hazard.	
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.		Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.	Isolate	e People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and		Engineering Isolate the hazard.	
is the second m	the second most effective method of controlling a hazard. Engineering by isolation is the true post engineering the work is the fourth most effective method. PPE (Personal Protective Eq. ment) to be least effective.  Administrative Change the work.									

				PERS		TIVE EQUIPM					
		Select the app	ropriate PPŁ	abo v uitab	cor the equi	pment used or	the job task	being perforr	ned (if applica	ıble).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING ETION	P ECTION	PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE R	equired:										
	Pe	ermit or Licen	ses Requirem	ents			Ma	andatory Qual	ifications and	Training	



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Trip hazards, Noise levels	2M	- Conduct a pre-start safety briefing to ensure on workers are aware of the specific hazards and procedures involved with using an asphalt resign maching.  - Perform a comprehensive risk assessment its concept potential trip hazards in the work area, including uneven surfaces, loose materials, or tools left on the ground.  - Clearly mark identified trip had reds with high-visitory paid or signage, and if feasible, remove the hazard altogether to mitigate the sk.  - Ensure that we ways are athive a around the work area are kept clear at all times, implementing temporary by the ers or tapes in guides destrict araffic away from the work zone.  - Provide all permeters personal productive equipment (PPE) appropriate for the job, including safety boots as slip-result of an earmuffs or earplugs to every worker and visitor in the vicinity to safeguard against the han noise wells associated with milling machines.  - Carry or regult maintenance and inspection of the asphalt milling machine to confirm it is in safe we high or didition locusing on parts that may contribute to excessive noise generation.  - Limit is a sure time to noise by rotating tasks among workers, giving them breaks from the loud vironment, or by scheduling noisy operations during periods of less frequent activity.  - In plement engineering controls where possible, such as acoustic enclosures or barriers, to reduce noise emissions from the equipment.  - Schedule mandatory hearing tests for employees to ensure early detection of noise-induced hearing loss and to reinforce the importance of hearing conservation practices.  - Enforce a strict policy to keep non-essential personnel away from the equipment during operation to minimize the number of individuals exposed to trip hazards and noise.  - Incorporate anti-vibration mounts or pads beneath milling machinery to dampen vibration and lessen both movement and noise output.  - Provide thorough training for all operators and nearby workers about safe operating procedures, emergency stop mechanisms, and ef	1L
2. Equipment Inspection	Mechanical failure, Electric shocks	3Н	- Ensure all machinery is subject to a pre-operational check each day before use to identify any defects or maintenance issues that could lead to mechanical failure. Use a standardised checklist that covers all major components of the asphalt milling machine to ensure consistency.  - Implement a regular maintenance schedule, in alignment with the manufacturer's recommendations, and keep detailed records to prevent mechanical failures due to wear and tear over time.  - Verify that all operators are trained to recognise the signs of electrical faults and understand the emergency shutdown procedures to promptly deal with electric shocks and minimize injury risk.	1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Incorporate residual current devices (RCDs) into the electrical circuit to provide an additional layer of protection against electric shock, ensuring these are tested regularly for functionality.	
			- Mandate the use of personal protective equipmer at PE), such as rubber-insulated gloves and non-conductive safety footwear, for operators to missase the risk of electric shocks.	
			- Conduct tool inspection to identify cracket ousings, de leged insulation, or exposed wires, and take defective tools out of service immediately une apair to e made by a qualified technician to prevent electric shocks.	
			- Designate only qualified elsecticians to perform a air work one electrical components of the asphalt milling machine to reduce the although the electric section and the electric section and the electrical components of the asphalt milling machine to reduce the electric section and the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the asphalt milling machine to reduce the electrical components of the elec	
			- Apply lockout/tag (2007) produces during inspection, maintenance, or any situation where unexpected englisation could cause electric state or mechanical movement that may result in injury.	
			- Establish an maintain of a labels a strong signs highlighting electric shock risks and important oper guide as for operators to be easily.	
			- Prov. e. orkers of comprehensive training and instructions on safe operating procedures, including how to price typins the asphalt milling machine to avoid both mechanical failures and electric shock inciden. Recolarly reach this training to ensure ongoing compliance and understanding.	
			that very step is accountably adhered to. It's crucial to not just put these controls in place but also to active, a pitor their adherence to maintain a safe working environment.	
			St., here is a list of detailed control measures for the work step: 3. Start of Milling Process with the identified hazards of Flying debris and Dust inhalation:	
			- Ensure all machinery operators and nearby workers are provided with appropriate personal protective equipment (PPE), including safety googles or face shields to protect against flying debris, and P2-rated dust masks or respiratory protective equipment (RPE) to prevent dust inhalation.	
			- Fit the asphalt milling machine with well-maintained and effective dust suppression systems such as water spray nozzles or extraction units to minimise airborne dust particles.	
3. Start of Milling	Flying debris, Dust inhalation	2M	- Conduct a pre-start inspection of the milling machine to check for any mechanical defects that might cause malfunction or increase the risk of flying debris.	1L
Process	Trying dobits, Dust illinated on		- Set up exclusion zones around the milling area where only essential personnel can enter, to keep other workers safe from the risk of flying debris.	
			- Provide appropriate training and competency assessments for all operators on the safe use and emergency shut-down procedures of the milling machine.	
			- Conduct a thorough risk assessment and method statement specific to the particular job before starting the milling process, ensuring all potential risk of flying debris and dust inhalation are identified and controlled.	
			- Install physical barriers or guarding around the milling drum to contain debris and reduce the risk of material ejection.	



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Develop and implement safe work methods or standard operating procedures (SOPs) – such as correct milling pattern and sequence – that aim to reduce the velocity and volume of debris being ejected.	
			- Ensure regular housekeeping and removal of debug in the work area to prevent accumulation which could become a projectile hazard or contribute auust generation.	
			- Utilise vacuum attachments when availabe and ensured by are connected and functioning properly to capture dust at the point of origin.	
			- Assess weather conditions, particularly wind seed and direction, before commencement of work to avoid dust being blown toward workers or into the sublic species.	
			- Rotate tasks amongst crew may bers to limit individual exposure time to high-dust areas and flying debris.	
			- Ensure clear communicated is machined aroung all workers to promptly identify and address unsafe conditions relief to debrif and dust.	
			Always member of amply with the workplace health and safety legislation applicable to your location in Austra and the greelines set by the Safe Work Australia. Regularly review and update these control measures in espons	
4. Operation of Milling Machine	Crashes and Collisions,	ЗН		1L




SPECIFIC WORK STEPS  HAZARDS THAT MAY ARISE  NATTAL. RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK  SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS  RESIL RISK  RESIL RISK	JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
5. Constant Monitoring Falls from height, Latur visuality  2M	SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Constant Monitoring Falls from height, Lat or viscolity  2M					
5. Constant Monitoring  Falls from height, Landerwise, pity  2M					
	5. Constant Monitoring	Falls from height, Land or visconity			2M
					1
6. Maintenance Proximity to moving parts, Chemical exposure 3H		Proximity to moving parts, Chemical	3H		11



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
7. Tool Changes	Hand injuries, Eye injuries	2M		1L



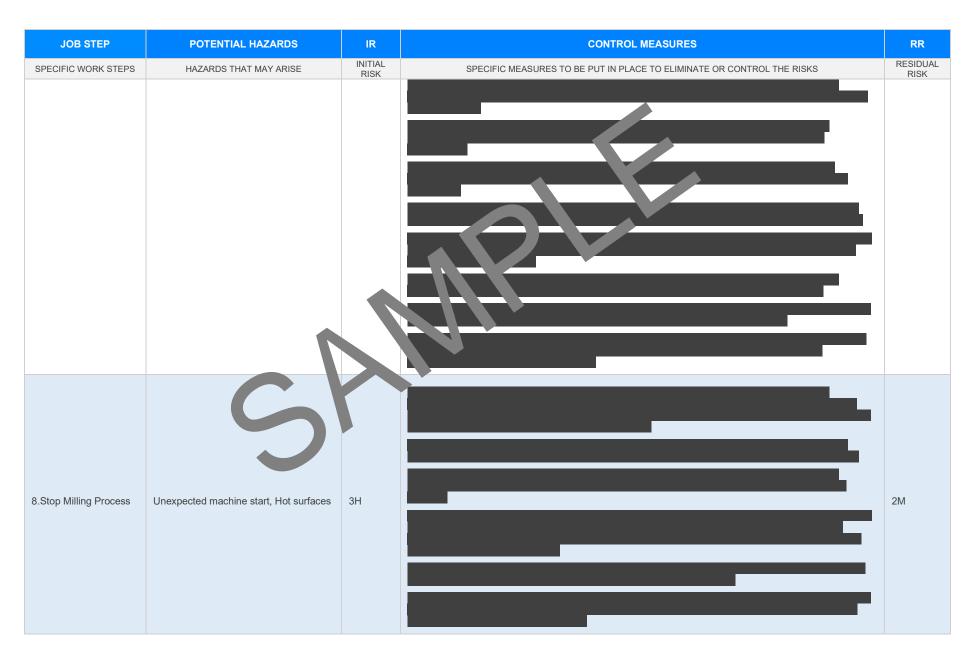



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
9.Clean Up	Slips on spilt material, Improper disp al	ЗН		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
10.Disassembly of Machine	Crush injuries, Pinch points			1L
11.Shut Down	Energy release, Burns	3Н		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
12.Servicing	Fire risk, Hazardous waste disposal	4A		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
13.Reporting Hazards	Communication breakdowns, Incorrect information	2M		1L




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
14.Evaluation of Work	Overexertion, Job dissatisfaction	ЗН		<b>1</b> L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
15.Process Review	Non-compliance, Docess inefficiency	2M		1L



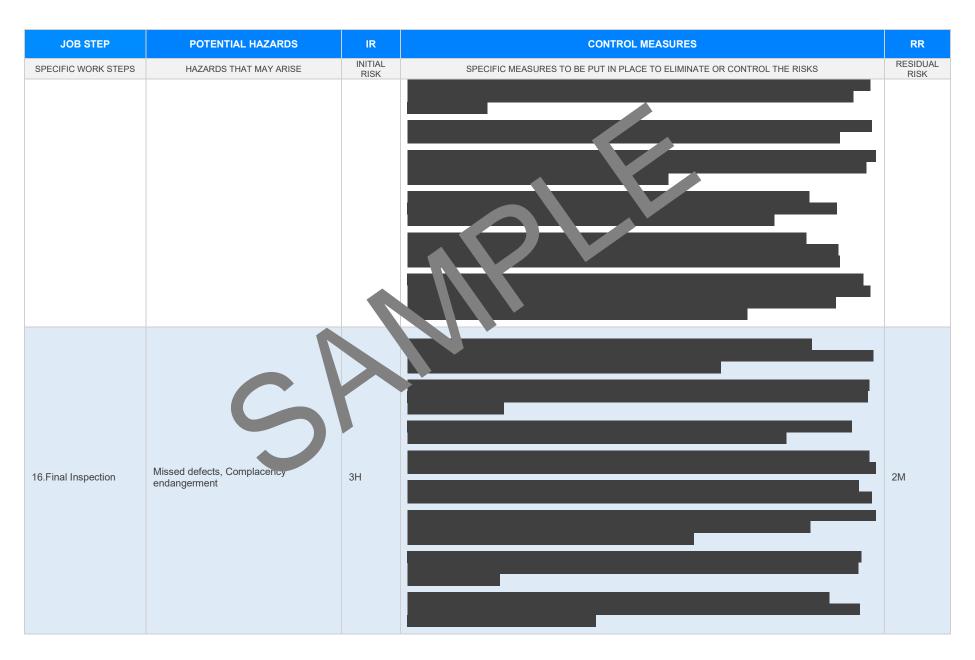



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
				•



#### **EMERGENCY RESPONSE - CALL 000 FOR EMERGENCIES**

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

#### LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES. ANY STATE OF AT ARE NOT APPLICABLE.

#### **Queensland & Australian Capital Territory**

Work Health and Safety Act 2011

Work Health and Safety Regulations 2011

Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice

Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations

Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

#### **New South Wales**

Work Health and Safety Act 2011

Work Health and Safety Regulations 2017

Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislatide

Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/lis > odes-oi racti

#### **Northern Territory**

Work Health and Safety (National Uniform Legislation) Act 2011

Work Health and Safety (National Uniform Legislation) Regulation 201

Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/wo\_place-

Codes of Practice NT: https://worksafe.nt.gov.au/f

#### South Australia

Work Health and Safety Act 2012 (SA)

Work Health and Safety Regulations 2012 (SA)

Legislation for SA: https://www.safework.sa.gov.au/resources/legislation

Codes of Practice for SA: https://www.safework.sa.gov.au/work\_aces/codes-of-practice#COPs

#### Tasmania

Work Health and Safety Act 2012

Work Health and Safety (Transitional and Consequential Provisions) Act 2012

Work Health and Safety Regulations 2012

Work Health and Safety (Transitional) Regulations 2012

Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations

Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

#### Victoria

Occupational Health al. Safety Act

Occupational Health and affety gulations 2017

Legis on VIC: https://www.csafe.vic.gov.au/occupational-health-and-safety-act-and-

gulat

des on actice VI autros://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

#### Western Australia

Work Health and Safety Act 2020

Work Health and Safety Regulations 2022

Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation

Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

#### Safe Work Australia Links

Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

#### **Model Codes of Practice**

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work





#### SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

#### SAFE WORK IN THE STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains a fective of must be reviewed (and revised if necessary) if relevant control measures are revised. The view process should be carried out in consultation with workers (including contractors of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU mast ensure that advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a rest of the review are advised of the changes in a way that will enable them to implement their duties and the involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- Spot Checks.
- 2. Consultation with workers, contractors and sub-contractors.
- 3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							

Version 2.5 Authorised by Review # Date of Issue: Review Date: 19





### SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.		
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.		
Foreseeable hazards are identified and documented for each step.		
Any hazards listed in any site risk assessments have been added to the SWMS		
SWMS initial risk (IR) column as well as residual risk (RR) column pupleted.		
Check control measures added to the SWMS are the most effective selections		
Responsible person is assigned and listed on the part the important control measures.		
Permit or licenses requirements specified, sur as Hot Work, Electric Work, Work at Heights etc.		
SWMS identifies plant and equipment to be us		
Details of inspection checks required for any equipment listed an inoted on the SWMS.		
Describes any mandatory qualifications, experience, and or skills required to perform the work.		
Applicable personal protective equipment is selected on the SWMS.		
Reflects and documents any legislative references and/or Australian Standards.		
Identifies any hazardous substances used with specific control measures in line with any SDS.		
REVIEWED BY	DATE REVIEWE	D
SIGNATURE	DATE COMPLET	ED