



Brake Lathe SA	AFE WORK METHOD STAT	EMENT (SWMS)	
	TASK OR ACTIVITY: Brake Lathe	•	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E jil:	
THIS SAFE WORK METHOD	STATEMENT IS APPROVED BY	THE PCL OF THE ROJECT	
Under the Work Health and Safety Regulation (WHS Regulation), a person conduct the proposed work starts.	cting a business or under a (PC 1) is	required to en that a safe work method s	statement (SWMS) is prepared before
Full Name:			
Signature:		Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitoring a	opliance the VMS a well as review	s and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS & VMS IN HAVE THE FOLLOWING COMMUNICATED	NA. 2 OF ALL RELEVANT PERSONNI EVELOPMENT AND APPROVAL OF	EL WHO HAVE BEEN CONSULTED AND CO	OMMUNICATED TO IN THE
Safety meetings or toolbox talks will be sched and in account with a gislative requirements to first identify any site hazards, and then to further take steps to either eliminate or continuous hazard.			
If an incident or a near miss occurs, all work must ste, anately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			





CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH BIOK CONSTRUCTOR	NAME OF THE POLIT
ANY HIGH-RISK CONSTRUCTOR	N WC & BEIN C ARIED OUT
☐ involves a risk of a person falling more than 2 meters	is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	\square is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical integral of a functure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing asb	☐ involves tilt-up or precast concrete
☐ involves structural alteration or repair that —quires term — v sup —rt to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
☐ is carried out in/near a shaft or trench deeper that. tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
\square is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	Y OR EQUIPMENT NEARBY



RISK MATRIX										
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION	HEI	RARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	ACTION		Elimination Remove the hazard.	
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.		Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.	Isolate	e People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and		Engineering Isolate the hazard.	
is the second m	rchy of Controls: ost effective metho nging the work is th	d of controlling a	hazard. Enginee	ering by isolati	on is the in ost e	en 'ive, while	rd. Substitution Administrative effective		Administrative Change the work. PPE	

				PERS		TIVE EQUIPM					
		Select the app	ropriate PPŁ	abo v uitab	cor the equi	pment used or	the job task	being perforr	ned (if applica	ıble).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING ETION	P ECTION	PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE R	equired:										
	Pe	ermit or Licen	ses Requirem	ents			Mandatory Qualifications and Training				



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Inadequate lighting, Slips and trips	2M	 Regular inspection and maintenance of the corkspace's lighting system to ensure ample illumination for workers. Installation of additional task-specific lighting and othe brake lathe if needed, such as portable lights or adjustable task lamps. Adequate housekeeping praces in the work are circle of regular tidying up of equipment, tools, and materials to reduce of the and is no floor spaces free of obstructions. Proper identification and conage opotential coor trip hazards, including any cords, hoses, cables, or uneven floor of that could be present. Implementing on-slipe or mats or stoces around the brake lathe area to help prevent slips, particles of in are some tooil or grease contamination. Ensuring or kers of a rappropriate footwear with slip-resistant soles while operating the brake lathe or working in its lightly. Regular raining and reminders to employees about the importance of maintaining a clean and well-lit we slace or minimes accidents and injuries. Clear or arcation of designated walkways and paths within the workspace to separate pedestrian traffic in the brake lathe area, thus reducing potential trip hazards. Encouraging employees to report any issues related to poor lighting or slip and trip hazards so that timely corrective action can be taken. Maintaining an adequate inventory of spare light bulbs and relevant parts to facilitate quick replacements whenever necessary. Regular review and updates to the company's Workplace Health and Safety (WHS) policies and procedures, specifically addressing the hazards associated with brake lathe operation, lighting, and workspace design. Conducting periodic WHS audits and inspections to monitor compliance with established protocols and continuously identifying opportunities for improvement in managing these hazards. 	1L
2. Machine Set-up	Electrical hazards, Pinch points	ЗН	 Ensure that the brake lathe is installed by a qualified technician following the manufacturer's guidelines and Australian Standards for electrical equipment, reducing the risk of electrical hazards and shocks. Conduct regular inspections and maintenance checks of the electrical system and components of the brake lathe to identify and address any potential issues before they pose a hazard. Use lockout/tagout (LOTO) procedures during machine set-up to ensure that there is no accidental power activation, which could cause electrical hazards or accidents with pinch points. Always wear appropriate personal protective equipment (PPE), such as safety glasses, gloves, and steel-toed shoes, to reduce the risk of injuries due to pinch points and other hazards during machine set-up. 	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Train workers involved in the machine set-up on proper techniques and safety precautions to prevent incidents related to electrical hazards or pinch points, including how to recognise potential issues before they become dangerous.	
			- Keep the area around the brake lathe clean a well-lit to avoid clutter or poor visibility, which could lead to mistakes and increase the risks of accident during machine set-up processes.	
			- Place warning signs and barriers around the rork and during machine set-up to alert others about the potential hazards and keep them at a safe distance on pinch points and electrical components.	
			- Make sure all guards and pre-ective covers are quirely in the on the brake lathe, especially when working near pinch points or extrical components, are the risk of contact-related injuries.	
			- Establish an emparation and a make sure workers know the location of emergency stop buttons, fire extinguishers an air repared is as a problem arises during machine set-up.	
			- Encourage volkers to foll w standard reduing procedures (SOPs) and to consistently communicate with control of set-up process, fostering a culture of safety awareness and teamwork that reduces the likeling of accidents involving electrical hazards or pinch points.	
			- Prope rain to Ensure that all workers operating the brake lathe have received adequate training in its operation including recognition of hazards and safe working procedures.	
			- Prona Protective Equipment (PPE): Require all personnel involved in brake drum inspection to wear approper PPE, such as safety glasses, gloves, and steel-toed boots.	
			egular maintenance: Schedule regular inspections and maintenance for the brake lathe, ensuring that all tating parts are in proper working condition and any sharp edges are addressed.	
			Workspace organisation: Keep the work area around the brake lathe clean and free from debris, ensuring that there is sufficient space for safe movement during brake drum inspection.	
			- Guarding: Install and maintain appropriate machine guarding to prevent contact with sharp edges or rotating parts during the brake drum inspection process.	
Brake Drum Inspection	Sharp edges, Rotating pods	3H	- Emergency Stop: Ensure that an emergency stop button or switch is easily accessible to quickly halt the brake lathe in case of a hazard or accident.	1L
			- Lockout/Tagout procedures: Implement lockout/tagout procedures for when conducting maintenance, repair, or servicing tasks on the brake lathe to prevent accidental reactivation.	
			- Clear communication: Display clear signage and labels on and around the brake lathe that indicate its purpose, potential hazards, and proper use.	
			- Lighting: Ensure that the work area is well-lit, giving operators a clear view of their workspace and the brake drum being inspected.	
			- Two-Person Teams: Encourage two-person teams for brake drum inspections, with one person positioning the drum and the other checking for defects, thus reducing the risk of injury due to improper handling or distraction.	
			- Safe Handling Techniques: Train workers on the fundamentals of safe material handling, focusing on how to handle heavy objects like brake drums without putting themselves at risk of injury.	



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Inspection frequency: Establish a schedule for routine brake drum inspections to ensure that any hazards are identified and addressed as soon as possible.	
			- Incident reporting: Create a system for reporting investigating any accidents or near misses that occur during brake drum inspection, with the air for identifying areas for improvement and implementing additional safety measures as needed.	
4. Mounting Brake Drum	Manual handling, Fluing objects	2M		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Adjust Tooling	Pinch points, Entanglement	2M		1 L




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
6. Cutting Process	Noise exposure, Flying debris	3H		ZM



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
7. Debris Removal	Hand injuries, Eye hazards	OM.		114
8. Brake Drum Removal	Manual handling, Dropping drum	2M		1L



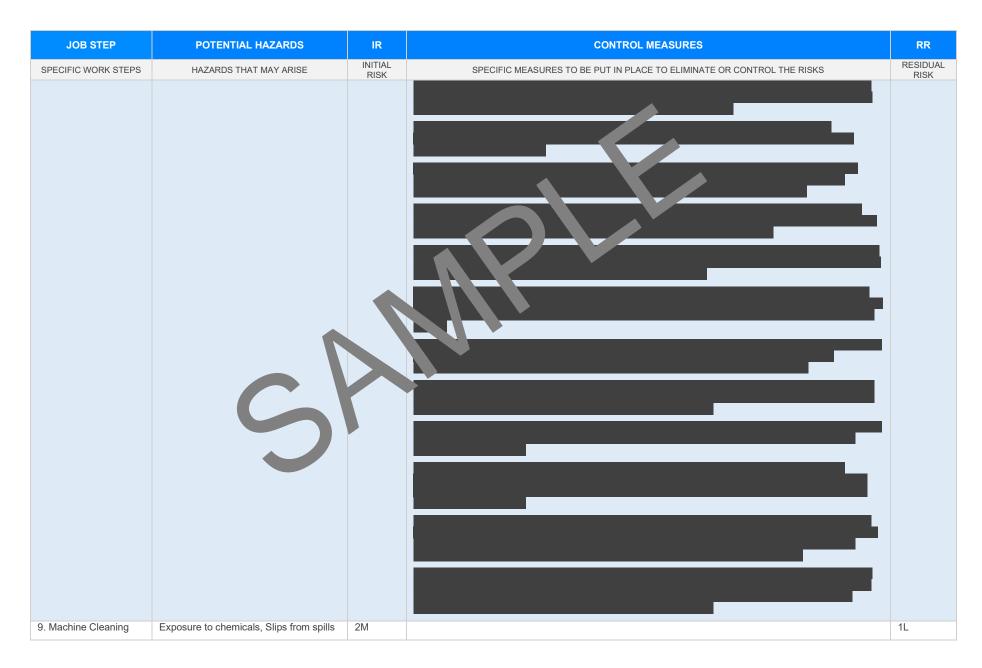



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
10. Maintenance	Power source, Moving parts	2M		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
11. Machine Disassembly and Storage	Back strain, Crush hazard	2M		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	5			
12. Housekeeping	Slips and trips, Poor visibility	1L		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK



EMERGENCY RESPONSE - CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES. ANY STATE OF AT ARE NOT APPLICABLE.

Queensland & Australian Capital Territory

Work Health and Safety Act 2011

Work Health and Safety Regulations 2011

Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice

Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations

Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

New South Wales

Work Health and Safety Act 2011

Work Health and Safety Regulations 2017

Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislati

Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/lis > odes-oi racti

Northern Territory

Work Health and Safety (National Uniform Legislation) Act 2011

Work Health and Safety (National Uniform Legislation) Regulation 2011

Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/wo_place-

Codes of Practice NT: https://worksafe.nt.gov.au/f

South Australia

Work Health and Safety Act 2012 (SA)

Work Health and Safety Regulations 2012 (SA)

Legislation for SA: https://www.safework.sa.gov.au/resources/le

Codes of Practice for SA: https://www.safework.sa.gov.au/work_aces/codes-of-practice#COPs

Tasmania

Work Health and Safety Act 2012

Work Health and Safety (Transitional and Consequential Provisions) Act 2012

Work Health and Safety Regulations 2012

Work Health and Safety (Transitional) Regulations 2012

Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations

Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

Victoria

Occupational Health al. Safety Act

Occupational Health and affety gulations 2017

Legis on VIC: https://www.ssafe.vic.gov.au/occupational-health-and-safety-act-and-

gulat

tes of actice VIC attps://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

Western Australia

Work Health and Safety Act 2020

Work Health and Safety Regulations 2022

Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation

Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

Safe Work Australia Links

Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

Model Codes of Practice

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work





SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

SAFE WORK IN THE STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains a fective of must be reviewed (and revised if necessary) if relevant control measures are revised. The view process should be carried out in consultation with workers (including contractors of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU mast ensure that advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a rest of the review are advised of the changes in a way that will enable them to implement their duties and the involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- Spot Checks.
- 2. Consultation with workers, contractors and sub-contractors.
- Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							





SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
		•
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.		
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.		
Foreseeable hazards are identified and documented for each step.		
Any hazards listed in any site risk assessments have been added to the SWMS		
SWMS initial risk (IR) column as well as residual risk (RR) column pleted.		
Check control measures added to the SWMS are the most effective selective selective.		
Responsible person is assigned and listed on the property of the important of measures.		
Permit or licenses requirements specified, sur as Hot Work, Electric Work, Work at Heights etc.		
SWMS identifies plant and equipment to be us		
Details of inspection checks required for any equipment listed a noted on the SWMS.		
Describes any mandatory qualifications, experience, or skills required to perform the work.		
Applicable personal protective equipment is selected on the SWMS.		
Reflects and documents any legislative references and/or Australian Standards.		
Identifies any hazardous substances used with specific control measures in line with any SDS.		
REVIEWED BY	DATE REVIEWE	D
SIGNATURE	DATE COMPLETE	ED