



Synthetic Sling Usag	e SAFE WORK METHOD	STATEMENT (SWMS)	
TASH	OR ACTIVITY: Synthetic Sling	Usage	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E il:	
THIS SAFE WORK METHOD	STATEMENT IS APPROX TO BY	THE PC. 'OF TP' . ROJECT	
Under the Work Health and Safety Regulation (WHS Regulation), a person conduct the proposed work starts.	cting a business or undo	required to en that a safe work method	statement (SWMS) is prepared before
Full Name:			
Signature:	NY	Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitoring a	poliance the VMS activell as review	s and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS & (MS M) HAVE THE FOLLOWING COMMUNICATED	NA. 2 OF ALL RELEVANT PERSONN EVELOPMENT AND APPROVAL OF	EL WHO HAVE BEEN CONSULTED AND C THIS SWMS	OMMUNICATED TO IN THE
Safety meetings or toolbox talks will be sched ed in account with gislative requirements to first identify any site hazards, and then to further take steps to either eliminate or continuous each hazard.			
If an incident or a near miss occurs, all work must sto, an alately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			

Version 2.5 Authorised by Review # Date of Issue: Review Date: 1





CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH BIOK CONSTRUCTOR	NAME OF THE POLIT
ANY HIGH-RISK CONSTRUCTOR	N WC & BEIN C ARIED OUT
☐ involves a risk of a person falling more than 2 meters	is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	\square is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical integral of a functure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing asb	☐ involves tilt-up or precast concrete
☐ involves structural alteration or repair that —quires term — v sup —rt to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
☐ is carried out in/near a shaft or trench deeper that. tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
\square is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	Y OR EQUIPMENT NEARBY

Version 2.5 Authorised by Review # Date of Issue: Review Date: 2



RISK MATRIX										
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION	HEI	RARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	ACTION		Elimination Remove the hazard.	
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.		Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.	Isolate	e People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and		Engineering Isolate the hazard.	
is the second m	rchy of Controls: ost effective metho nging the work is th	d of controlling a	hazard. Enginee	ering by isolati	on is the in ost e	en 'ive, while	rd. Substitution Administrative effective		Administrative Change the work. PPE	

				PERS		TIVE EQUIPM					
		Select the app	ropriate PPŁ	abo v uitab	cor the equi	pment used or	the job task	being perforr	ned (if applica	ıble).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING ETION	P ECTION	PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE R	equired:										
	Pe	ermit or Licen	ses Requirem	ents		Mandatory Qualifications and Training					



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Slip, trip or fall, incorrect manual handling techniques	3H	 Ensure the work area is clear of any obstators or debris to minimise the risk of slips, trips, or falls. Perform a risk assessment before commenting work adentify potential hazards and appropriate control measures. Provide adequate lighting in the work area to enter exisibilities and reduce the risk of accidents. Use signage and barriers to countly mark the work and keep unauthorised personnel out. Conduct manuformalities anning or all workers involved in sling operations to promote correct lifting techniques. Ensure that here surface are clean access to prevent slipping during the handling of synthetic slings. Protect noti-slip again areas where the risk of slipping is heightened. Estate ship of enforce a clear protocol for reporting and immediately addressing any spills or trip hazards. Maintainal equation areas where the risk of slipping to manufacturer's guidelines to ensure safe operation. Require arkers to wear appropriate personal protective equipment (PPE), including safety footwear that revides adequate grip. Implement a buddy system for lifting heavy items to distribute weight evenly and reduce strain. Regularly review and update safety procedures and training practices to incorporate feedback and improvements based on recent incidents or near misses. 	2M
2. Pre-Use Inspection	Failure of equipment, trapping injury	3H	 Conduct a thorough visual inspection of the synthetic sling before each use to check for any visible signs of wear, tear, or damage. Train all users on the correct methods to inspect synthetic slings, highlighting key features to look out for such as frayed edges, broken fibres, and abnormal stretching. Use a checklist for pre-use inspections to ensure consistency and comprehensiveness in assessing the synthetic sling's condition. Immediately remove from service any sling that shows signs of damage, no matter how minor they may seem, until verified and cleared by a competent authority. Store synthetic slings properly when not in use to prevent them from being damaged by environmental elements or mechanical forces. Ensure the work environment where the slings are used is free of sharp objects that could cut or abrade the sling during operations. Adhere to manufacturer's guidelines on the weight limits and usage conditions to avoid overstressing the slings. 	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Require periodic inspections and audits by qualified professionals to assess and verify the integrity of synthetic slings.	
			- Keep records of all inspections, maintenance, application of the condition over time.	
			- Provide protective sleeves or coverings for vnthetic slive when used in environments with high risk of abrasion or exposure to harmful chemicals.	
			- Educate workers about the potential hazards a sociated with interoper use of synthetic slings and the importance of following safety rotocols.	
			- Ensure that all sequences higs bond on site comply with Australian Standards AS 1353.1 for flat synthetic webbonds all AS 45 of for round langs.	
			- Conduct though training or all working the proper selection and inspection of synthetic slings, include a under a higher the working load limit (WLL) and the importance of sling angle in the calculation of action ad.	
			- Utilise a section go te or load chart specifically developed for synthetic sling usage that includes parame are in weight onfiguration, balance, and surface condition of the load.	
			pplement a consklist, verified by a competent person, to confirm the correct type of sling is selected price of use. This set should include factors such as load shape, size, weight, and rigging technique.	
			Maintan, sling registry log that records each sling's identification, WLL, inspection dates, damage orts, and maintenance history.	
. Sling Selection	ncorrect sling for load ding vorking load limit ()		- Perform pre-use checks to identify any signs of wear, tear, deformation, or chemical damage on the synthetics slings. Any defective or damaged slings must be immediately removed from service.	1L
			- Ensure that operators know not to exceed the marked WLL on the sling, which includes considering factors like sling angles, which can significantly affect the effective capacity.	
			- Provide adequate supervision on site to monitor and ensure proper handling and usage of synthetic slings, especially during selection and installation stages.	
			- Develop and enforce a policy for periodic reviews and updates of all materials related to handling guidelines, particularly sling selection strategies, to align with new safety standards or improved operation procedures.	
			- Place easy-to-read, durable tags on each sling detailing essential information such as type, WLL, manufacture date, and fibre material to prevent misuse.	
			- Insist on simulation or practice sessions in controlled environments for workers to get familiarised with different loads and sling settings before actual operations commence to ensure confidence and correct sling selection under various conditions.	
	Underestimating weight, incorrect			
Load Calculation	calculation methods	3H		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Sling Attachment	Inadequate securement of load, falling objects	ЗН		1 L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
6. Lifting Operations	Load swing, load drop, upeontrolled movement	31		2M
7. Transportation of Load	Collision, worker struck by moving load	3H		2M








JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
9. Sling Detachment	Sudden release of loau, trapped fing	ЗН		1L
10. Post-Use Inspection	Undetected damage or wear, failure of equipment	3H		1L



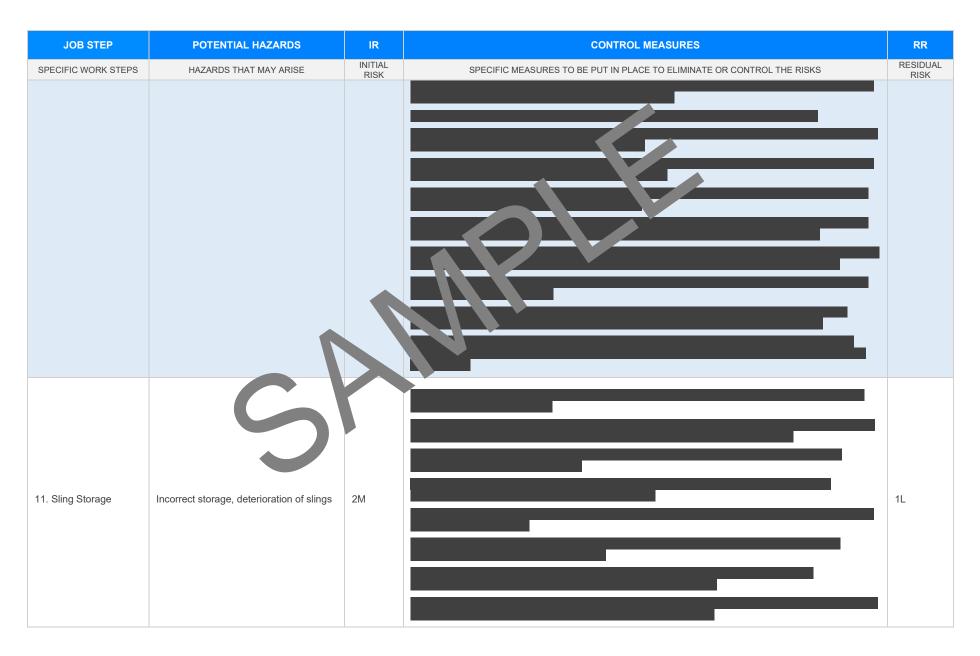



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
PECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDU <i>A</i> RISK
				_
				1
Faurinasant	Failed maintenand			_
Equipment intenance	unexpected equipment allure	ВН		1L
				I



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
13. Emergency Procedures	Delayed response time, lack of understanding of procedures	ЗН		2M
14. Waste Disposal	Exposure to hazardous substances, lifting injuries	ЗН		2 M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
15. Worker Training	Inadequate knowledge or skills, improper use of equipment	ЗН		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
16. Supervision	Insufficient oversight, repeated safety violations	3H		2M
17. Site Demarcation	Non-compliance with boundary restrictions, injury from moving vehicles	3H		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
18. Communication Procedures	Misunderstandings, non-compliance with instructions	ЗН		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
				1
	7			
19. Documentation	Incorrect or missing records, legal compliance issues	ЗН		■ 1L
Completion	compliance issues	311		15



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
20. Incident Management	Inadequate incident response, lack of accurate records			1L



EMERGENCY RESPONSE - CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES. ANY STATE OF AT ARE NOT APPLICABLE.

Queensland & Australian Capital Territory

Work Health and Safety Act 2011

Work Health and Safety Regulations 2011

Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice

Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations

Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

New South Wales

Work Health and Safety Act 2011

Work Health and Safety Regulations 2017

Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislati

Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/lis > odes-oi racti

Northern Territory

Work Health and Safety (National Uniform Legislation) Act 2011

Work Health and Safety (National Uniform Legislation) Regulation 201

Codes of Practice NT: https://worksafe.nt.gov.au/f

South Australia

Work Health and Safety Act 2012 (SA)

Work Health and Safety Regulations 2012 (SA)

Legislation for SA: https://www.safework.sa.gov.au/resources/legislation

Codes of Practice for SA: https://www.safework.sa.gov.au/work_aces/codes-of-practice#COPs

Tasmania

Work Health and Safety Act 2012

Work Health and Safety (Transitional and Consequential Provisions) Act 2012

Work Health and Safety Regulations 2012

Work Health and Safety (Transitional) Regulations 2012

Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations

Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

Victoria

Occupational Health at Safety Act

Occupational Health and Infety gulations 2017

Legis on VIC: https://www.wksafe.vic.gov.au/occupational-health-and-safety-act-and-

gulat

tes of actice VIC attps://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

Western Australia

Work Health and Safety Act 2020

Work Health and Safety Regulations 2022

Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

Safe Work Australia Links

Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

Model Codes of Practice

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work





SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

SAFE WORK IN THE STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains a fective of must be reviewed (and revised if necessary) if relevant control measures are revised. The view process should be carried out in consultation with workers (including contractors of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU mast ensure that advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a rest of the review are advised of the changes in a way that will enable them to implement their duties and the involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- Spot Checks.
- 2. Consultation with workers, contractors and sub-contractors.
- 3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							

Version 2.5 Authorised by Review # Date of Issue: Review Date: 19





SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.		
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.		
Foreseeable hazards are identified and documented for each step.		
Any hazards listed in any site risk assessments have been added to the SWMS		
SWMS initial risk (IR) column as well as residual risk (RR) column pleted.		
Check control measures added to the SWMS are the most effective selections		
Responsible person is assigned and listed on the part the important control measures.		
Permit or licenses requirements specified, sur as Hot Work, Electric Work, Work at Heights etc.		
SWMS identifies plant and equipment to be us		
Details of inspection checks required for any equipment listed an inoted on the SWMS.		
Describes any mandatory qualifications, experience, and or skills required to perform the work.		
Applicable personal protective equipment is selected on the SWMS.		
Reflects and documents any legislative references and/or Australian Standards.		
Identifies any hazardous substances used with specific control measures in line with any SDS.		
REVIEWED BY	DATE REVIEWE	D
SIGNATURE	DATE COMPLET	ED