Tunneling Safety | SAFE WORK METHOD STATEMENT (SWMS)

TASK OR ACTIVITY: Tunneling Safety

Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	Email:	

THIS SAFE WORK METHOD STATEMENT IS APPROVED BY THE PCBU OF THE PROJECT

Under the Work Health and Safety Regulation (WHS Regulation), a person conducting a business or undertaking (PCBU) is required to ensure that a safe work method statement (SWMS) is prepared before the proposed work starts.

Full Name:		
Signature:	Title:	Date:

Details of the person(s) responsible for ensuring implementation, monitoring and compliance of the SWMS as well as reviews and modifications of the SWMS.

Full Name:	Title:	Phone:

ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS SWMS MUST HAVE THE FOLLOWING COMMUNICATED	NAME OF ALL RELEVANT PERSONNEL WHO HAVE BEEN CONSULTED AND COMMUNICATED TO IN THE DEVELOPMENT AND APPROVAL OF THIS SWMS
Safety meetings or toolbox talks will be scheduled in accordance with legislative requirements to first identify any site hazards, communicate those hazards and then to further take steps to either eliminate or control each hazard.	
If an incident or a near miss occurs, all work must stop immediately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.	
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.	
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.	

CLIENT OR PRINCIPAL CONTRACTOR DETAILS	
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	

ANY HIGH-RISK CONSTRUCTION WORK BEING CARRIED OUT	
☐ involves a risk of a person falling more than 2 meters	☐ is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	☐ is carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	☐ is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical integrity of a structure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing asbestos	☐ involves tilt-up or precast concrete
☐ involves structural alteration or repair that requires temporary support to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
☐ is carried out in/near a shaft or trench deeper than or tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
☐ is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.

ANY HIGH-RISK MACHINERY OR EQUIPMENT NEARBY

RISK MATRIX

LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE		
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCEE
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review befo work starts.
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and k records

HEIRARCHY OF CONTROLS

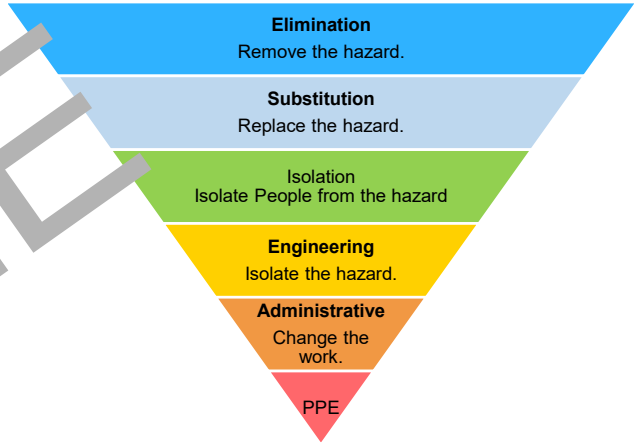

Notes on Hierarchy of Controls: Elimination methods are the most effective and preferre en co lli a hazard. Substitution is the second most effective method of controlling a hazard. Engineering by isolation is the ost ef ve, while Administrative Controls by changing the work is the fourth most effective method. PPE (Personal Protective Eq ment) he least effective method.

PERS AL P TECTIVE EQUIPMENT (PPE)

Select the appropriate PPE bov uitable or the equipment used or the job task being performed (if applicable).

FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING PROTECTION	EY PROTECTION	RESPIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
											
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Other PPE Required:

Permit or Licenses Requirements	Mandatory Qualifications and Training

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
Pre-start planning and design	• Inadequate geotechnical information • Incorrect tunnel alignment • Unidentified underground services • Inadequate ventilation design • Insufficient emergency egress provision	4A	• Engage a suitably qualified geotechnical engineer to complete site-specific ground investigation and report prior to tunnelling works • Review and verify tunnel alignment, gradient and cover against design drawings and survey data before works commence • Dial Before You Dig and engage a certified underground service locator to identify and mark all known services in the work zone • Develop and document a ventilation design that meets AS 2294 and ensures compliance with Safe Work Australia exposure standards for airborne contaminants • Design and document primary and secondary egress routes, including maximum travel distances and refuge numbers where required • Prepare a project-specific Tunnelling Work Health and Safety Management Plan in accordance with WHS Regulations and relevant Codes of Practice • Conduct a formal HAZOP or similar risk workshop with engineers, contractor representatives and key workers to identify and control critical tunnelling risks • Specify plant, Road Header, micro tunnelling rigs and Tunnel Boring Machines (TBMs) to be fit for purpose, with documented compliance to AS/NZS and OEM requirements • Plan micro tunnelling shafts, jacking pits and reception pits to avoid undermining adjacent structures, roads and services • Obtain written approvals and permits from road authorities, utility owners and asset managers before tunnelling beneath or near their infrastructure • DO NOT commence any tunnelling until design documentation, engineering verifications and service plans have been reviewed and signed off by a competent person	2M
Site establishment and traffic control	• Unplanned vehicle movement • Mobile plant and pedestrian interaction • Public traffic intrusion • Unstable work platforms • Inadequate site access for emergency services	3H	• Develop and implement a Traffic Management Plan in accordance with local road authority requirements and AS 1742 • Install physical barriers, bollards and lockable gates to separate public areas from tunnelling work zones • Erect clear signage for speed limits, plant crossings, no-go zones and exclusion zones at all site access points • Designate pedestrian walkways with high-visibility barriers and ensure these are separated from haul roads and plant operating zones • Verify all access roads and work platforms are constructed to withstand anticipated axle loads and GVM of plant and delivery vehicles • Use spotters with two-way radios to control reversing of trucks, road headers and support vehicles in congested areas	1L

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			• Implement a site-specific induction that explains traffic routes, parking areas and plant-pedestrian interaction rules • Maintain clear access routes for fire appliances and ambulances and mark these on site plans and in the Emergency Response Plan • Install adequate lighting for access roads, shafts and pit entries to meet AS/NZS 1680 and eliminate dark spots • DO NOT allow public vehicles or unescorted visitors into active tunnelling or shaft areas • DO NOT exceed posted site speed limits or manufacturer's maximum operating gradients for plant	
Shaft and pit excavation	• Ground collapse at shaft • Falling objects into shaft • Falls into open shafts • Underground service strike • Excavator rollover	4A	• Engage a geotechnical engineer to design shaft and pit support systems, including shotcrete, sheet piles or ground anchors where required • Install edge protection around shafts and pits using compliant guardrails, toe boards and mesh to AS 1657 • Use engineered shoring or shield systems for pits and shafts in accordance with design and manufacturer specifications Confirm locations of underground services with vacuum excavation or hand digging before machine excavation near known or suspected services Maintain exclusion zones around excavators and cranes; use spotters to enforce no-go areas within swing radius • Sequence excavation to maintain stable batters and avoid undermining adjacent structures or roadways • Install overhead protection where there is a risk of falling objects entering the shaft or pit • Regularly inspect shaft walls, pit supports and ground conditions for signs of movement, cracking or water ingress; stop work if conditions deteriorate • Provide safe access and egress to shafts via fixed ladders or stair towers in accordance with AS 1657 • Cover or barricade shafts and pits when unattended using lockable steel plates or fixed barriers with signage • DO NOT enter unsupported excavations or shafts without written authorisation from a competent person • DO NOT excavate below designed founding levels or outside specified pit dimensions without engineer approval	2M
Tunnel set-out and survey control	• Survey equipment trip hazards • Incorrect tunnel line and grade • Working near open edges • Laser exposure to eyes	3H	[redacted]	1L

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			[redacted]	
Tunnel boring machine setup	• Crushing during T[redacted] assembly • Uncontrolled TBI[redacted] • Hydraulic system failure • Electrical energisation • Incorrect TBM thrust alignment	4A	[redacted]	2M
Road header and excavation operations	• Contact with rotating cutter head	4A		2M

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	• Ground fall at tunnel face • Flying rock fragments • Dust and silica exposure • Unplanned plant movement		[redacted]	
Micro tunnelling operations	• Jacking frame overload • Pipe joint failure • Ground heave or subsidence • Pressurised slurry release • Confined work in jacking pit	4A	[redacted]	2M

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			[redacted]	
TBM tunnelling and spoil removal	• Entrapment in rotating components • Conveyor belt entan[redacted] • Tunnel flooding • Loss of face pres[redacted] • Exposure to diesel exhaust	4A	[redacted]	2M
Tunnel support system installation	• Falling support segments • Segment erector crush injury • Rock bolt failure	4A	[redacted]	2M

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	• Working under unsupported ground • Shotcrete rebound and overspray		[redacted]	
Services, ventilation and power installation	• Electric shock from temporary power • Ventilation duct collapse • Falling pipework or cables • Manual handling strain • Inadequate lighting in tunnel	3H	[redacted]	1L

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			[redacted]	
Confined space and atmosphere management	• Oxygen deficiency • Toxic gas accumulation • Explosive atmospheres • Restricted access for rescue • Panic in emergency	4A	[redacted]	2M
Emergency response and evacuation	• Delayed emergency response • Entrapment underground	4A	[redacted]	2M

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	• Fire in tunnel or shaft • Communication failure • Inadequate first aid		[redacted]	
Housekeeping, inspections and shift handover	• Slips on mud and slurry • Trips on hoses and cables • Unreported ground movement • Unidentified equipment defects • Fatigue-related error	3H	[redacted]	1L

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			[redacted]	

EMERGENCY RESPONSE – CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES ANY STATE THAT ARE NOT APPLICABLE

Queensland & Australian Capital Territory
Work Health and Safety Act 2011
Work Health and Safety Regulations 2011
Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws
Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice
Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations
Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

New South Wales
Work Health and Safety Act 2011
Work Health and Safety Regulations 2025
Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislation
Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/list-of-codes-of-practice

Northern Territory
Work Health and Safety (National Uniform Legislation) Act 2011
Work Health and Safety (National Uniform Legislation) Regulations 2011
Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/workplace-safety-laws
Codes of Practice NT: https://worksafe.nt.gov.au/forms-and-resources/codes-of-practice

South Australia
Work Health and Safety Act 2012 (SA)
Work Health and Safety Regulations 2012 (SA)
Legislation for SA: https://www.safework.sa.gov.au/resources/legislation
Codes of Practice for SA: https://www.safework.sa.gov.au/workplaces/codes-of-practice#COPs

Tasmania
Work Health and Safety Act 2012
Work Health and Safety (Transitional and Consequential Provisions) Act 2012
Work Health and Safety Regulations 2012
Work Health and Safety (Transitional) Regulations 2012
Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations
Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

Victoria
Occupational Health and Safety Act 2004
Occupational Health and Safety Regulations 2017
Legislation VIC: https://www.worksafe.vic.gov.au/occupational-health-and-safety-act-and-regulations
Codes of Practice VIC: https://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

Western Australia
Work Health and Safety Act 2020
Work Health and Safety Regulations 2022
Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation
Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

Safe Work Australia Links
Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation
Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

Model Codes of Practice

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work

SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

SAFE WORK METHOD STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains effective and must be reviewed (and revised if necessary) if relevant control measures are revised. The review process should be carried out in consultation with workers (including contractors and sub-contractors) who may be affected by the operation of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU must ensure that all persons involved with the work are advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a result of the review are advised of the changes in a way that will enable them to implement their duties consistently with the revised SWMS. All workers that will be involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

1. Spot Checks.
2. Consultation with workers, contractors and sub-contractors.
3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							

SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.	☒	
All relevant personnel consulted during the development of the SWMS.	☒	
Name, signature, position and date signed of the person approving the SWMS.	☐	
Specific personnel and qualifications, experience is noted in the SWMS.	☒	
Provides a step-by-step process of tasks required to carry out the activity or task.	☒	
Adequate risk assessment of any identified hazards has been completed.	☒	
Foreseeable hazards are identified and documented for each step.	☒	
Any hazards listed in any site risk assessments have been added to the SWMS.	☒	
SWMS initial risk (IR) column as well as residual risk (RR) column completed.	☒	
Check control measures added to the SWMS are the most effective selection.	☒	
Responsible person is assigned and listed on the SWMS for the implementation of control measures.	☒	
Permit or licenses requirements specified, such as Hot Work, Electrical Work, Work at Heights etc.	☒	
SWMS identifies plant and equipment to be used.	☒	
Details of inspection checks required for any equipment listed and noted on the SWMS.	☒	
Describes any mandatory qualifications, experience, training or skills required to perform the work.	☒	
Applicable personal protective equipment is selected on the SWMS.	☒	
Reflects and documents any legislative references and/or Australian Standards.	☒	
Identifies any hazardous substances used with specific control measures in line with any SDS.	☒	

REVIEWED BY		**DATE REVIEWED**	
SIGNATURE		**DATE COMPLETED**	