

Enter and Exit of Scissor Lift to Access Top of Cool Room | SAFE WORK METHOD STATEMENT (SWMS) TASK OR ACTIVITY: Enter and Exit of Scissor Lift to Access Top of Cool Room **Business Name:** ABN: SWMS# **Business Address:** Contact Person: Phone: THIS SAFE WORK METHOD STATEMENT IS APPROVED BY THE PC. OF THE PROJECT that a safe work method statement (SWMS) is prepared before Under the Work Health and Safety Regulation (WHS Regulation), a person conducting a business or und U) is required to e the proposed work starts. Full Name: Title: Date: Signature: SWI Details of the person(s) responsible for ensuring implementation, monitoring compliar as well as reviews and modifications of the SWMS. Full Name: Title: Phone: ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS WMS NA OF ALL RELEVANT PERSONNEL WHO HAVE BEEN CONSULTED AND COMMUNICATED TO IN THE HAVE THE FOLLOWING COMMUNICATED **PEVELOPMENT AND APPROVAL OF THIS SWMS** Safety meetings or toolbox talks will be schedled in account e with egislative requirements to first identify any site hazards nuni te those hazards and then to further take steps to either eliminate or con I each hazard. diately. Depending If an incident or a near miss occurs, all work must six on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity. Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel. The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.



CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH-RISK CONSTRUCTOR	ON WC & BEIN C & RIED OUT
involves a risk of a person falling more than 2 meters	is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-hearing	☐ is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical interrity structure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing as	☐ involves tilt-up or precast concrete
involves structural alteration or repair the requires to rary so port to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
is carried out in/near a shaft or trench deeper an or tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
is carried out in or near water or other liquid that involves a risk of drowning.	involves diving work.
ANY HIGH-RISK MACHINER	Y OR EQUIPMENT NEARBY



RISK MATRIX										
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION		HEIRARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	SCORE	ACTION		Elimination Remoy e the hazard.
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.		Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.		Isolation Isolate People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and records		Engineering Isolate the hazard.	
is the second m	archy of Controls: nost effective methologing the work is	od of controlling a	a hazard. Engine	ering by isolat	ion is the nost of	e. tive, while	ard. Substitution e Administrative least effective		Administrative Change the work.	

						TIVE EQUIPM					
		Select the app	propriate PPL	abo suitak	ok for the equip	oment used or	the job task	being perfori	med (if applica	able).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	THE ARING STION	P _cCTION	PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE R	equired:										
	Pe	ermit or Licen	ses Requirem	ients			Mandatory Qualifications and Training				



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Inadequate training, poor lighting	ЗН	- Ensure all operators have current, valid his wisk work licences and relevant training in operating scissor lifts. - Conduct a thorough site-specific induction was wers, highlighting potential hazards and safety procedures related to scissor lift operation. - Implement a buddy system to nexperienced work its use or supervision of trained personnel until they are confident and constent. - Provide adea are task noting to insure visit by during work operations, especially in dimly lit areas. - Use portably ghting who fixed light part not sufficient, ensuring it does not cause glare or shadows that could improve visit. - Control tre-star deetings to discuss tasks, address concerns, and reinforce safe work practice require be. - Clearly mark only are exit points with reflective tape or signage to enhance visibility. - saintal a club offee area around the scissor lift to minimise trip hazards during access and egress. - Verily of afety equipment such as helmets and harnesses are correctly fitted and used. - resignate exclusion zones with barriers or cones to prevent unauthorised personnel from accessing the waster. - Regularly inspect the condition of the scissor lift, including emergency descent features and handrails. - Provide a briefing on emergency procedures, including the location of first aid kits and how to summon medical assistance if needed. - Establish clear communication systems, such as two-way radios or mobile phones, to report any issues immediately. - Implement a system for regular safety audits and reviews to continuously identify and rectify potential hazards.	2M
2. Pre-Operational Inspection	Equipment malfunction, missing safety features	ЗН	 Conduct a thorough visual inspection of the scissor lift for any signs of damage or wear. Verify that all controls and safety mechanisms, including emergency stop buttons, are functioning correctly. Ensure that the operator is trained and competent to conduct the pre-operational inspection of the scissor lift. Check that the scissor lift is equipped with fully functional guard rails and toe boards to prevent falls. Confirm that the manufacturer's manual and safety procedures are readily available on-site. Inspect tyres for appropriate pressure and tread wear to ensure stability during operation. Validate that all warning labels and operational decals are present and legible. 	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
		THOR	- Test alarm systems and horn functions to ensure they are working as intended.	THOIT
			- Ensure battery or power source levels are adequate for the duration of the task without risk of sudden shut-off.	
			- Assess ground conditions where the scisc part will be used to confirm stability and load capacity.	
			- Review maintenance records to confirm to tregular avicing and inspections have been carried out.	
			- Use a checklist to document the pre-operation results, ensuring any defects are reported and repaired before use.	
			- Conduct a prelimination inspiration to identify and seess unstable ground conditions before scissor lift use.	
			- Use ground lates or ma to stable the ase of the scissor lift on soft or uneven surfaces.	
			- Ensemblat an open as are trained and familiar with the specific scissor lift model being used.	
			- Esta is clean vel pathway free from obstructions for the scissor lift's movement route.	
			- Implement traffic in pagement plan to control vehicle and pedestrian movements around the work area.	
			k ar clean, sign any overhead hazards or obstructions within the work zone.	
Site Safety Assessment	Unstable ground, obstructions	'A	Utilise ters or ground personnel to assist in identifying and guiding around potential hazards.	3H
Assessment			- uip operators with adequate communication devices to maintain contact with ground personnel.	
			Regularly inspect and maintain the scissor lift to ensure operational integrity and safety.	
			- Verify that the scissor lift is equipped with functional tilt and overload warning systems.	
			- Confirm that all personal protective equipment (PPE) required for the task is available and worn by workers, including helmets and high-visibility clothing.	
			- Restrict unauthorised personnel from entering the work zone while the scissor lift is in operation.	
			- Designate and demarcate exclusion zones around areas where the scissor lift may have limited stability.	
			- Review weather conditions prior to operation to avoid using the lift in high winds or adverse weather that could affect stability.	
4. PPE Check	Incorrect PPE, damaged PPE	3H		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Scissor Lift Positioning	Uneven surface, nearby obstacles	ЗН		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
6. Emergency Plan Review	Lack of emergency procedures, uncle roles	44		3H
7. Fall Arrest System Set-Up	Incorrect anchor point, faulty harness	4A		3H



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
				_
				•
				_
				•
8. Initial Ascent	Mechanical failure, lose balance	4A		3H



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
9. Entering Cool Room Area	Obstructed path, high traffic area	ЗН		2M




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
10. Exiting the Scissor Lift	Slips, equipment not stable	4A		3Н
11. Working on Top of Cool Room	Fall from height, unsecured tools	4A		зн



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
12. Use of Tools and Machinery	Electric shock, en riglement	4A		3H
13. Continuous Monitoring	Falling objects, structural instability	ЗН		2M



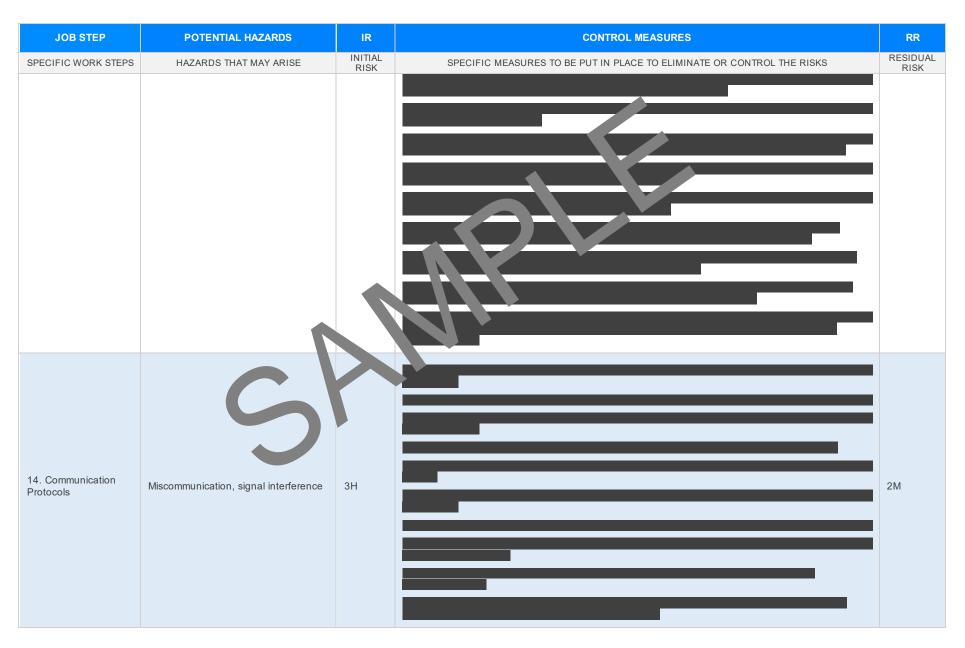




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
15. Re-entering the Scissor Lift	Trip hazards, incorrect thought			3H
16. Final Descent	Overloading, rapid descent risks	3H		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
17. Post-Operational Check	Hidden damage, fatigue	3Н		1L



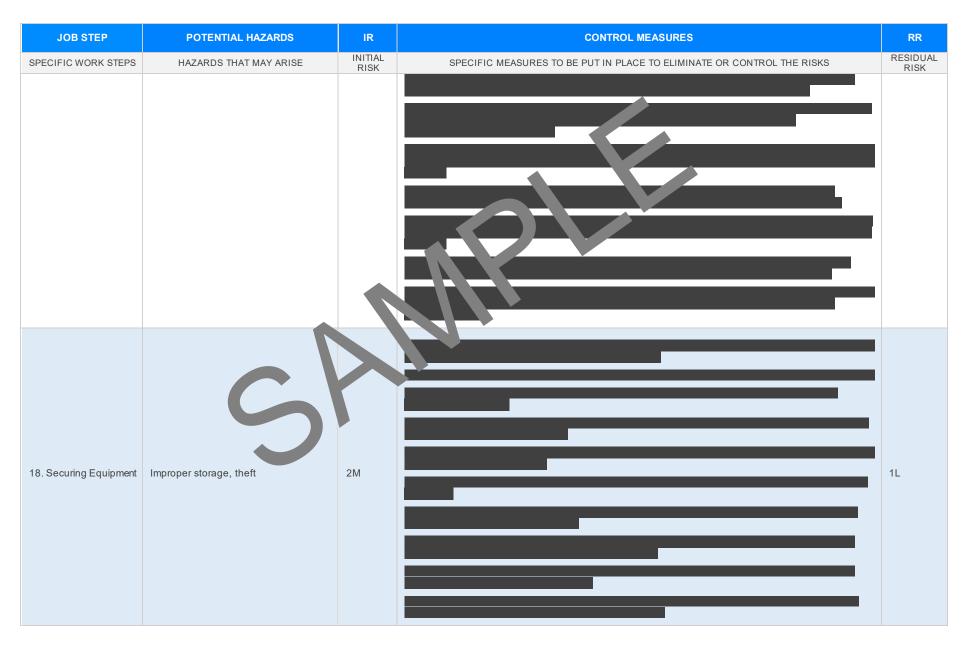



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
19. Debrief and Feedback	Lack of debrief, insufficient feedback collection	2M		1L
20. Emergency Process	Insufficient rescue equipment, no trained personnel	4A		3H



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAI RISK
				-
	•	1		



EMERGENCY RESPONSE - CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCE. IN ANY STATEMENT ARE NOT APPLICABLE

Queensland & Australian Capital Territory

Work Health and Safety Act 2011

Work Health and Safety Regulations 2011

Legislation QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws Codes of Practice QLD: https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice Legislation ACT: https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations

Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

New South Wales

Work Health and Safety Act 2011

Work Health and Safety Regulations 2017

Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legis

Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library.

Northern Territory

Work Health and Safety (National Uniform Legislation) Act 201

Work Health and Safety (National Uniform Legislation) Regulations 26

Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/prkplate fety-lay

Codes of Practice NT: https://worksafe.nt.gov.av and-reso per des ractice

South Australia

Work Health and Safety Act 2012 (SA)

Work Health and Safety Regulations 2012 (S.

Legislation for SA: https://www.safework.sa.gov.au/resources gislation

Codes of Practice for SA: https://www.safework.sa.gov.au/w/wplaces/codes-of-practice#COPs

Tasmania

Work Health and Safety Act 2012

Work Health and Safety (Transitional and Consequential Provisions) Act 2012

Work Health and Safety Regulations 2012

Work Health and Safety (Transitional) Regulations 2012

Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations

Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

Victoria

Ocupational Health Safety A 2004

Octational Health an Safe* regulations 2017

- Legis ion VIC: https://www.orksafe.vic.gov.au/occupational-health-and-safety-act-and-
- des of actice VI attps://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

Western Australia

Work Health and Safety Act 2020

Work Health and Safety Regulations 2022

Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation

Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

Safe Work Australia Links

Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

Model Codes of Practice

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work



SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

SAFE WORK IN 'THE 'S' NTEMANT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remain effect, and must be reviewed (and revised if necessary) if relevant control measures are revised. The view as should be carried out in consultation with workers (including contractors as unputractors of the SWMS and their health and safety registeratives who represented that work group at the workplace.

When the SWMS has been revised the PCBD mest ensure the all persons involved with the work are advised that a revision has been made and how they can accept the revised SWMS, including all persons who will need to change a work procedure or system as a rest of the review are advised of the changes in a way that will enable them to implement their duties the total with the revised SWMS. All workers that will be involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- Spot Checks.
- Consultation with workers, contractors and sub-contractors.
- 3. Internal audits on a continual basis

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							



SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.		
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.	\boxtimes	
Foreseeable hazards are identified and documented for each step.		
Any hazards listed in any site risk assessments have been added to the SV. 5:		
SWMS initial risk (IR) column as well as residual risk (RR) column ampleted.		
Check control measures added to the SWMS are the most effer the securions.		
Responsible person is assigned and listed on the place of control measures.		
Permit or licenses requirements specified, so in as Hot Work, Electrical Work, Work at Heights etc.		
SWMS identifies plant and equipment to be		
Details of inspection checks required for any equipment lister are noted on the SWMS.		
Describes any mandatory qualifications, experience, and or skills required to perform the work.		
Applicable personal protective equipment is selected on the SWMS.		
Reflects and documents any legislative references and/or Australian Standards.		
Identifies any hazardous substances used with specific control measures in line with any SDS.		
REVIEWED BY	DATE RE	VIEWED
SIGNATURE	DATE COM	MPLETED