Stockyard Operations	S SAFE WORK METHOD	STATEMENT (SWMS)	
TASI	COR ACTIVITY: Stockyard Operation	ations	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E. ail:	
THIS SAFE WORK METHOD	STATEMENT IS APPRO	THE PC. OF TPT ROJECT	
Under the Work Health and Safety Regulation (WHS Regulation), a person conductive proposed work starts.	icting a business or under thing (Pur U) is	required to entry that a safe work method	statement (SWMS) is prepared before
Full Name:			
Signature:		Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitorin	compliance of the SWI, was well as re	eviews and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS WMS	NALE OF ALL RELEVANT PERSONN EVELOPMENT AND APPROVAL OF	NEL WHO HAVE BEEN CONSULTED AND	COMMUNICATED TO IN THE
Safety meetings or toolbox talks will be schedued in according e with egislative requirements to first identify any site hazards, and the to contain the those hazards and then to further take steps to either eliminate or contail each hazard.			
If an incident or a near miss occurs, all work must store a parallely. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			



CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
☐ involves a risk of a person falling more than 2 meters	d is carried out on or near pressurised gas mains or piping
□ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
□ involves demolition of an element of a structure that is load-bearing	□ is carried out on or near energised electrical installations or services
□ involves demolition of an element related to the physical integritystructure	\Box is carried out in an area that may have a contaminated or flammable atmosphere
□ involves, or is likely to involve, disturbing as the set of the	□ involves tilt-up or precast concrete
involves structural alteration or repair the requires to prary support to prevent collapse	\Box is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
□ is carried out in or near a confined space	\Box is carried out in an area of a workplace where there is any movement of powered mobile plant
□ is carried out in/near a shaft or trench deeper the first or tunnel involving use of explosives	\Box is carried out in areas with artificial extremes of temperature.
\Box is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	RY OR EQUIPMENT NEARBY



					RISK	MATRIX			
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION		HEIRARCHY OF CONTROLS
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE	ACTION		Elimination Remove the hazard.
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE		Substitution
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review befor work starts.		Replace the hazard.
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.		Isolate People from the hazard
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and key recorde		Engineering Isolate the hazard.
RARE 1 1 2 3 3 1L phitor and Engineering									

		Select the an	propriate PPL	PERS	VAL TEC	TIVE EQUIPM oment used or	ENT (PPE) the iob task	being perfor	med (if applica	able).		
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION			RL SPIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED	
Other PPE R	Required:					_						
	P	ermit or Lice	nses Requiren	nents			Mandatory Qualifications and Training					




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Slips, trips, and falls, Manual handling injuries	2М	 Ensure all workers receive training on manuar handling techniques and the correct use of equipment. Conduct regular inspections and maintenal e of walk arys to ensure they are free from obstructions and in good condition. Provide anti-slip footwear wall workers, especify those curvating in wet or slippery conditions. Implement clear signage indicating potential hazar are use where there is a higher risk of slips, trips, and falls. Arrange stateward layout minimize the propertor manual lifting and carrying by utilising mechanical aids. Keek work are work to enhance visibility and reduce the likelihood of accidents. Use optionriate using trolleys or forklifts to handle heavy loads and minimise manual lifting. Ensult immediate complex of any spills or debris in walkways or operational areas. Perform regular hazard assessments and updates to procedures based on identified risks. Estates among workers to avoid repetitive strain and fatigue that could increase accident risk. In wide adequate rest breaks to ensure workers maintain energy levels and focus throughout their shifts. Enforce a tidy workspace policy to ensure tools and materials are stored safely and not left in walking paths. 	1L
2. Fencing Installation	Injuries from tools, Exposure to harmful materials	зн	 Conduct a pre-work risk assessment to identify potential hazards and ensure all workers are informed of safe work practices. Provide personal protective equipment (PPE) such as gloves, goggles, and long-sleeved clothing to protect against tool injuries and exposure to materials. Ensure that all tools are in good working order and regularly maintained to reduce the risk of malfunction or injury. Implement proper training for all workers on the correct use of tools and handling of materials to minimise the risk of accidents. Establish a clear communication system among workers to promptly report any hazards or incidents observed during fencing installation. Utilise hand tools instead of power tools where feasible to reduce the severity of potential injuries. Designate specific areas for the storage of materials and tools to prevent tripping and falling hazards. Limit worker exposure time to potentially harmful materials by rotating tasks and ensuring breaks, especially in cases of harsh weather conditions. 	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Use barriers or screens to contain dust and other particulates generated during installation tasks.	
			- Apply non-toxic, eco-friendly materials for fencing whenever possible to reduce harmful exposure risks.	
			- Label all hazardous substances clearly and provide material safety data sheets (MSDS) for reference and guidance on safe handling practices.	
			- Monitor the work environment continuous, or the energence of additional hazards and adjust control measures accordingly.	
			- Provide comprehensive training for all employee, on safe mimal handling techniques and emergency response procedures	
			- Use well-main fined and opprovide personal protective equipment, including gloves, steel-capped boots, and the selected on hing.	
			- Implement class compresention process among staff to ensure coordinated efforts during loading active	
			- Ensure a guipment used in the loading process, such as gates and ramps, is regularly maintained and inspected for afety.	
			Design and numbrain stockyard facilities to minimise sharp corners and protrusions that might injure at mals a worke	
3. Livestock Loading	Animal-related injuries, Noise hazar	ЗН	Utilise the reducing barriers or padding around high-noise areas to protect workers from long-term aring damage.	1L
			- Stedule regular breaks for employees involved in loading activities to prevent fatigue-related accidents.	
			- Maintain a first-aid kit readily accessible at all livestock handling areas to address any injuries promptly.	
			- Conduct pre-loading assessments to determine animal behaviour and possible risks, and adjust strategies accordingly.	
			- Use non-slip surfaces and adequate lighting in loading zones to prevent slips, trips, and falls.	
			- Ensure that livestock transport vehicles are adequately prepared and in compliance with safety standards before loading begins.	
			- Limit access to loading areas to authorised personnel only, reducing the risk of interference and potential accidents.	
	Exposure to infectious agents, Slips,			
4. Stockyard Cleaning	trips, and falls	3H		2M



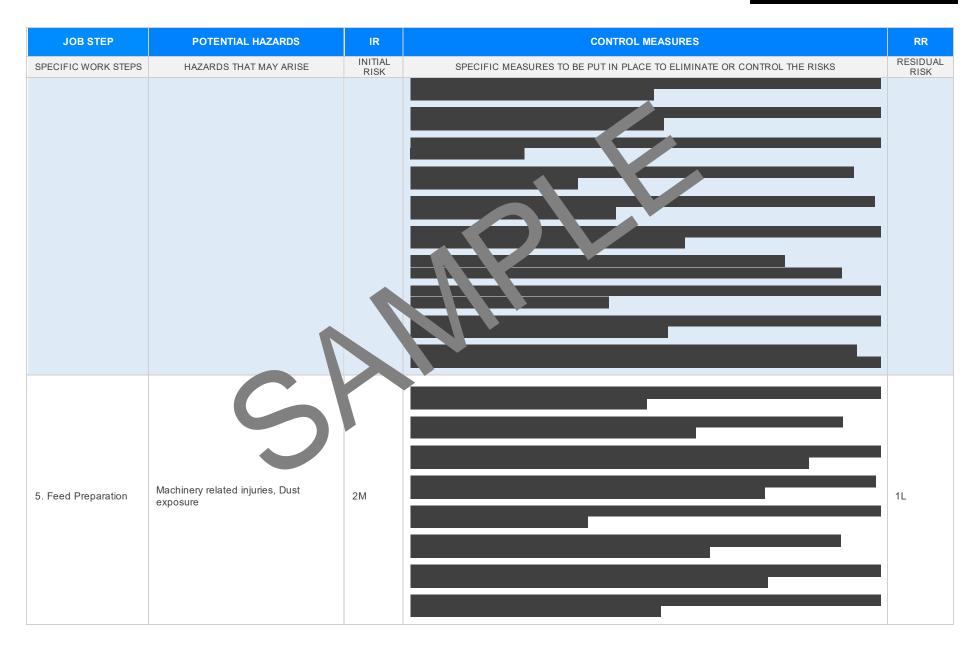





JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
6. Feeding Livestock	Animal-related injurity rylanual handling injuries	2M		
7. Bedding Handling	Manual handling injuries, exposure to biohazards	2M		1L

Version 2.5



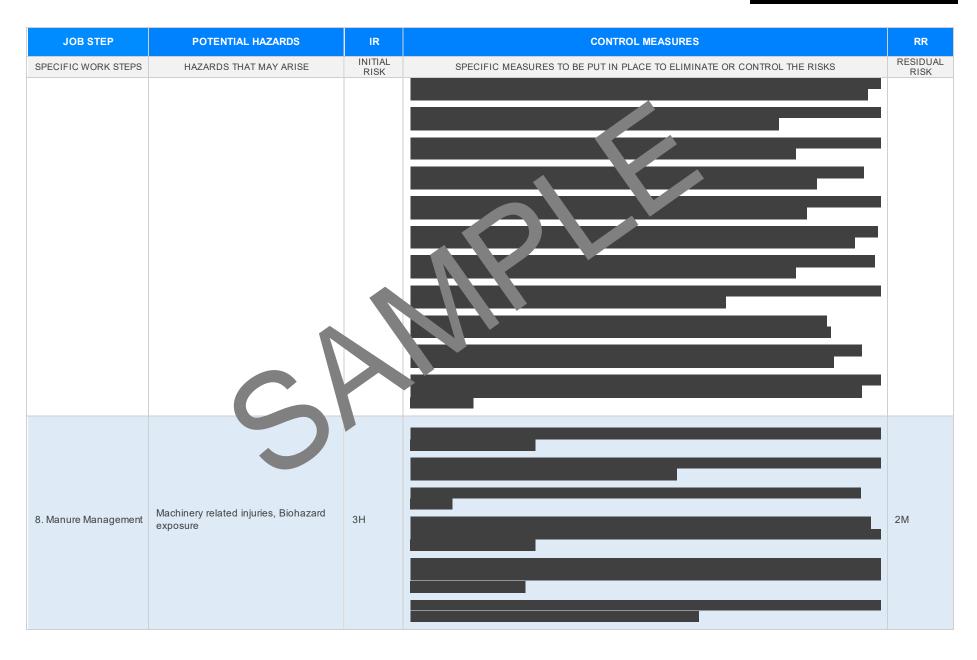



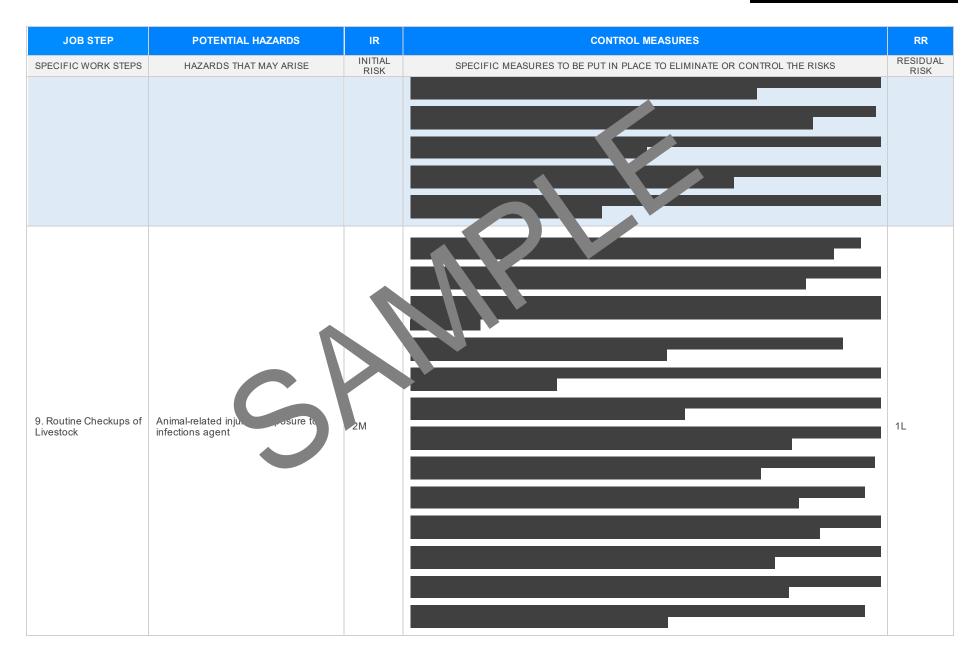




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
10. Vaccinations	Animal-related injuries, Needle stick injuries	ЗН		2М
11. Pest Control	Exposure to chemicals, Insect bites	2M		1L








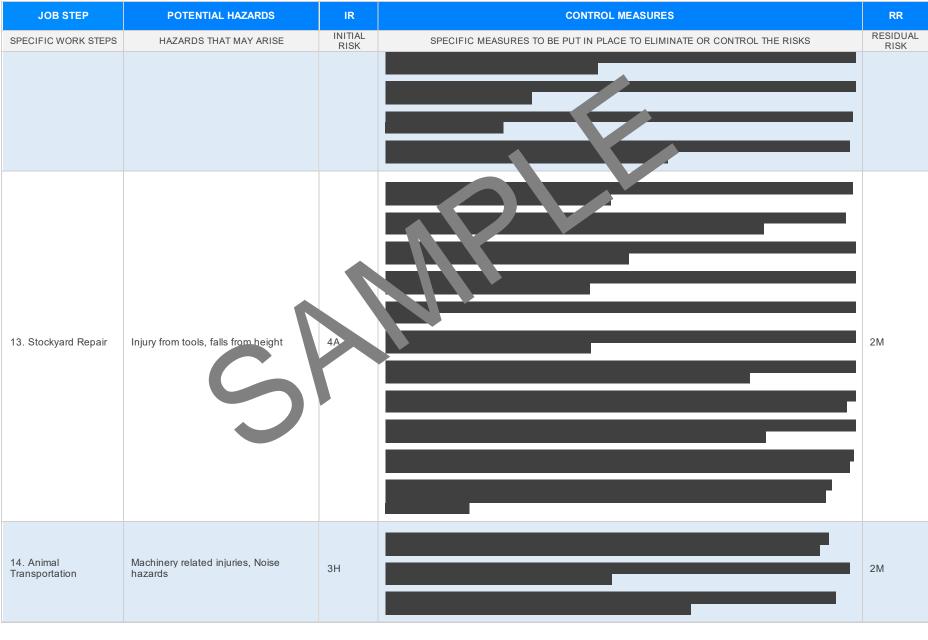

Date of Issue:



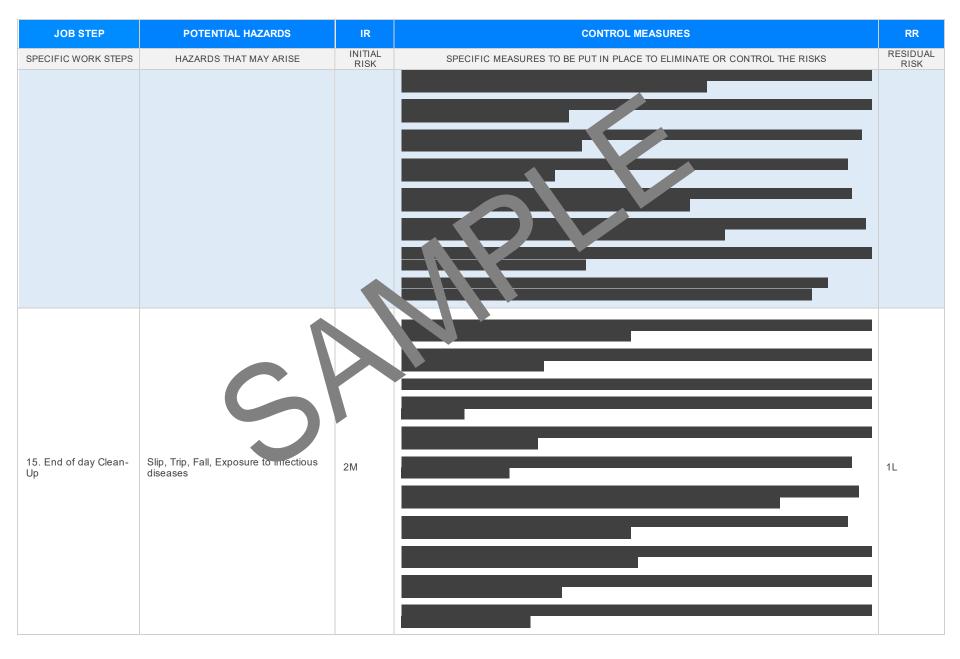


Date of Issue:



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	S			

EMERGENCY RESPONSE – CALL 000 FOR EMERGENCIES

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

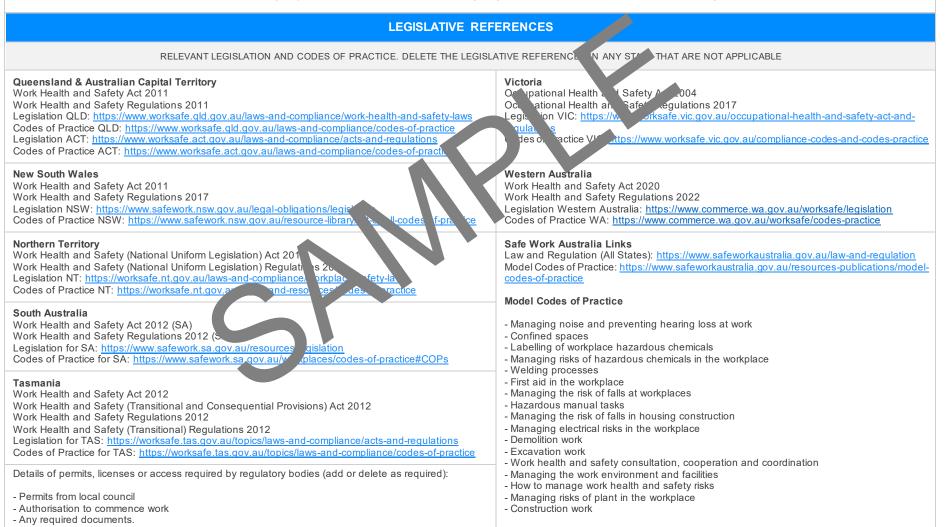

SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

SAFE WORK THE S ATEM AT MONITORING AND REVIEW The SWMS must be reviewed regularly to make sure it remain effect. and mu be reviewed (and The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are revised if necessary) if relevant control measures are revised. The s should be carried out in effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The view consultation with workers (including contractors person responsible for monitoring the effectiveness of the Safe Work Method Statement should ntractors nay be cted by the operation of the SWMS and their health and safety representatives who rep sented that work group at the employ a multi-faceted approach which includes but is not limited to: workplace. 1. Spot Checks. When the SWMS has been revised the PCBU must ensure the all versons involved with the work are 2. Consultation with workers, contractors and sub-contractors. advised that a revision has been made and how they can acce the revised SWMS, including all persons 3. Internal audits on a continual basis who will need to change a work procedure or system as a reof the review are advised of the changes in a way that will enable them to implement their duties ntly with the revised SWMS. All workers that An approach of continuous improvement, promptly recording inconsistencies or deficiencies, will be involved in the work must be provided with the relevant information and instruction that will assist followed up by immediate corrective action and consultation with all relevant personnel ensures them to understand and implement the revised SWMS. that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7	
NAME								
INITIALS								
DATE								

SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.	\boxtimes	
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.		
Foreseeable hazards are identified and documented for each step.	\boxtimes	
Any hazards listed in any site risk assessments have been added to the Sλ. S.	\boxtimes	
SWMS initial risk (IR) column as well as residual risk (RR) column completed.	\boxtimes	
Check control measures added to the SWMS are the most effective sections.	\boxtimes	
Responsible person is assigned and listed on the spiral of the spiral entry of control measures.	\boxtimes	
Permit or licenses requirements specified, so in as Hot Work, Electrical Work, Work at Heights etc.	\boxtimes	
SWMS identifies plant and equipment to be	\boxtimes	
Details of inspection checks required for any equipment lister are noted on the SWMS.	\boxtimes	
Describes any mandatory qualifications, experience, ang or skills required to perform the work.	\boxtimes	
Applicable personal protective equipment is selected on the SWMS.	\square	
Reflects and documents any legislative references and/or Australian Standards.	\boxtimes	
Identifies any hazardous substances used with specific control measures in line with any SDS.	\boxtimes	
REVIEWED BY	DATE REVIE	EWED
SIGNATURE	DATE COMP	LETED