



Installing New Transform	mers   SAFE WORK METHO	DD STATEMENT (SWMS)	
TASK O	R ACTIVITY: Installing New Trans	sformers	
Business Name:		ABN:	SWMS#
Business Address:			
Contact Person:	Phone:	E 111:	
THIS SAFE WORK METHOD	STATEMENT IS APPRO' D BY	THE PCL OF THE ROJECT	
Under the Work Health and Safety Regulation (WHS Regulation), a person conduct the proposed work starts.	cting a business or under o (PC 1) is	required to en that a safe work method s	statement (SWMS) is prepared before
Full Name:			
Signature:	NY	Title:	Date:
Details of the person(s) responsible for ensuring implementation, monitoring	opliance the VMS a well as review	s and modifications of the SWMS.	
Full Name:		Title:	Phone:
ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS MISS MISS MAKE THE FOLLOWING COMMUNICATED	NA, 2 OF ALL RELEVANT PERSONNI EVELOPMENT AND APPROVAL OF	EL WHO HAVE BEEN CONSULTED AND CO	OMMUNICATED TO IN THE
Safety meetings or toolbox talks will be sched and in account with gislative requirements to first identify any site hazards, hazards and then to further take steps to either eliminate or continuous each hazard.			
If an incident or a near miss occurs, all work must sto, an alately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			

Version 2.5 Authorised by Review # Date of Issue: Review Date: 1





CLIENT OR PRINCIPAL	CONTRACTOR DETAILS
Client:	SCOPE OF WORKS
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Date SWMS supplied to Project Manager:	
ANY HIGH BIOK CONSTRUCTOR	NAME OF THE POLIT
ANY HIGH-RISK CONSTRUCTOR	N WC & BEIN C ARIED OUT
☐ involves a risk of a person falling more than 2 meters	is carried out on or near pressurised gas mains or piping
☐ is carried out on a telecommunication tower	carried out on or near chemical, fuel or refrigerant lines
☐ involves demolition of an element of a structure that is load-bearing	$\square$ is carried out on or near energised electrical installations or services
☐ involves demolition of an element related to the physical integral of a functure	☐ is carried out in an area that may have a contaminated or flammable atmosphere
☐ involves, or is likely to involve, disturbing asb	☐ involves tilt-up or precast concrete
☐ involves structural alteration or repair that —quires term — v sup —rt to prevent collapse	☐ is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor
☐ is carried out in or near a confined space	☐ is carried out in an area of a workplace where there is any movement of powered mobile plant
☐ is carried out in/near a shaft or trench deeper that. tunnel involving use of explosives	☐ is carried out in areas with artificial extremes of temperature.
$\square$ is carried out in or near water or other liquid that involves a risk of drowning.	☐ involves diving work.
ANY HIGH-RISK MACHINER	Y OR EQUIPMENT NEARBY

Version 2.5 Authorised by Review # Date of Issue: Review Date: 2



RISK MATRIX									
LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION	HEIRARCHY OF CONTROLS	
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE	SCORE ACTION	Elimination Remove the hazard.		
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCE	Substitution	
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.	Replace the hazard.	
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.	Isolate People from the hazard	
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	nitor and	Engineering Isolate the hazard.	
is the second m	otes on Hierarchy of Controls: Elimination methods are the most effective and preferrence on the second most effective method of controlling a hazard. Engineering by isolation is the interpost entire, while Administrative ontrols by changing the work is the fourth most effective method. PPE (Personal Protective Equament) whe least effective								

				PERS		TIVE EQUIPM					
		Select the app	propriate PPL	abo√ ≃uitab	ic or the equi	pment used or	the job task	being perforr	ned (if applica	ıble).	
FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING ETION	P ECTION	R PIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
Other PPE R	Required:										
	Pe	ermit or Licen	ses Requirem	ents		Mandatory Qualifications and Training					



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
1. Preparation	Manual Handling, Slips/trips/falls	2M	<ul> <li>Conduct a pre-task risk assessment to ideally potential hazards specific to the preparation area.</li> <li>Use mechanical aids or team lifts to move a vyy equalitient, reducing the risk of manual handling injuries.</li> <li>Ensure that all personnel intolved in manual handling tasks as trained in correct lifting techniques.</li> <li>Keep the work area tidy and handfrom unnecessary the coles to minimise slips, trips, and falls.</li> <li>Wear appropriate bottwe with not-slip soles to enhance grip on various surfaces.</li> <li>Place adequate signage and barrica as around the preparation area to alert others of potential risks.</li> <li>Implement a contract unication protocol for team members to coordinate effectively during handling activities.</li> <li>Schedule undar has ekeeping to ensure any spills or debris are promptly cleaned up.</li> <li>Provid personal protocolve equipment, such as gloves and hard hats, to reduce injury risk.</li> <li>stablis designed walkways and work zones to streamline movement and avoid congestion.</li> <li>Carry degular inspections of tools and equipment to ensure they are in safe working condition.</li> <li>necourage reporting and reviewing of incidents or near-misses to continuously improve safety measures.</li> </ul>	1L
2. Site Assessment	Electric shock, Working in Public areas	ЗН	<ul> <li>Conduct a thorough site inspection before commencing work to identify potential electrical hazards and any live wires in the area.</li> <li>Implement isolation procedures by de-energising all circuits and using lockout/tagout systems to prevent accidental energisation during the installation process.</li> <li>Use insulated tools and wear appropriate personal protective equipment (PPE) such as rubber gloves, boots, and insulating mats to reduce the risk of electric shock.</li> <li>Set up barriers and warning signs around the work area to keep unauthorised personnel and members of the public at a safe distance.</li> <li>Ensure all workers are trained and competent in working with high voltage equipment and understand the risks associated with transformers.</li> <li>Establish a communication plan among all team members, including emergency contacts and procedures for reporting incidents or hazards onsite.</li> <li>Regularly test and tag all electrical equipment and tools used during the installation to ensure they are in good working order.</li> <li>Develop an emergency response plan specific to the site, detailing actions to take in case of electric shock or other dangers.</li> </ul>	2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
			- Assign a safety observer or spotter to monitor activities and alert workers to potential hazards, especially when working near crowds or public spaces.	
			- Schedule work during off-peak hours if installing to sformers in busy public areas to minimise exposure to pedestrians and vehicles.	
			- Collaborate with local authorities and utility companies to coordinate necessary road closures or diversions for the duration of the installation k.	
			- Ensure that the transformer is correctly ground and check for any potential sources of back feed from connected installations.	
			- Review and update job safety alysis (JSA) docume regularly to incorporate any new risks identified during the site assessments from a tion process.	
			- Develop a deviled traffic canagement of manage vehicle and pedestrian interactions in the work area.	
			- Use survisible gnage and barriers to direct and control site traffic and prevent unauthorised access to the lands, and use ading zones.	
	Traffic interaction, Manager Inc.		- Sched te transportation during off-peak hours to minimise interaction with other site activities and public ffic.	
			- Ens. a transport vehicles are fitted with reverse alarms, lights, and mirrors for enhanced visibility and afety.	
3. Transport Transformers			- nduct thorough checks and maintenance on forklifts and cranes to ensure they are fit for purpose and salely rated for the required loads.	1L
Transformers			- Assign experienced and licensed operators for the operation of heavy machinery, such as forklifts and cranes, involved in transporting transformers.	
			- Implement safe manual handling techniques training for workers to reduce risk of injury from lifting or moving heavy objects associated with transformer transportation.	
			- Utilise mechanical aids, such as hand trolleys or dollies, whenever possible to reduce manual lifting requirements.	
			- Conduct pre-task meetings to communicate potential hazards and control measures to all staff involved with transporting transformers.	
			- Employ spotters to help guide drivers and machinery operators when maneuvering in tight or congested spaces to avoid incidents and improve safety.	
4. Unloading Transformer	Falling objects, Manual Handling	3H		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
5. Installation Preparation	Energy sources, Chemical exposure	ЗН		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
				•
6. Lifting Transformer Into Position	Crushing, Falling e	\$A		2M
7. Secure Transformer	Incorrect installation, Faulty equipment	3H		1L




JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
8. Install Cabling	Electric shock, Cutting/abrasive hazards	4A		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
9. Connect Cabling	Faulty Equipment, Elemergy			1L
10. Insulation Installment	Chemical burns, Inhalation of particles	ЗН		2M



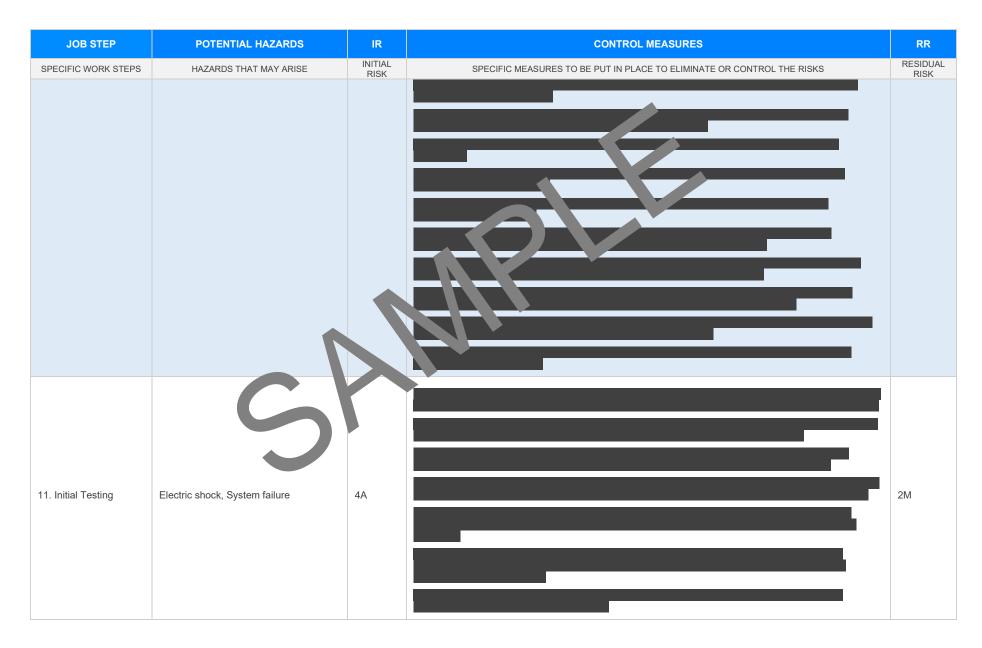



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
12. System Integration	System malfunction, Cyborsecurit threat	ЗН		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
13. Transformer Energisation	Electric Shock, Component failure	4A		2M
14. Final Inspection and Testing	Electric Shock, Non-conformity with standards	3Н		<b>1</b> L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
15. Clean Up and Disposal	Manual Handling, Chemical Exposure	ЗН		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
16. Documentation	Data error, Omission of relevant information	2M		1L
17. Review and Maintenance Planning	Faulty equipment, Lapses in maintenance	3H		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	Inadequate training, erstandi			
18. Conduct Training	Inadequate training, erstandinstruction	2M		1L



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
19. Monitor and Review	Inadequate monitoring, Insufficient feedback	2M		1L
20. Emergency Procedures Briefing	Incorrect procedures, Lack of first aid training	3Н		2M



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK
	_			
	5			



#### **EMERGENCY RESPONSE - CALL 000 FOR EMERGENCIES**

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

#### LEGISLATIVE REFERENCES

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES. ANY STATE OF AT ARE NOT APPLICABLE.

#### **Queensland & Australian Capital Territory**

Work Health and Safety Act 2011

Work Health and Safety Regulations 2011

 $\underline{\textbf{Legislation QLD:}} \ \underline{\textbf{https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws}}$ 

Codes of Practice QLD: <a href="https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice">https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice</a> Legislation ACT: <a href="https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations">https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations</a>

Codes of Practice ACT: https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice

#### **New South Wales**

Work Health and Safety Act 2011

Work Health and Safety Regulations 2017

Legislation NSW: https://www.safework.nsw.gov.au/legal-obligations/legislations/

Codes of Practice NSW: https://www.safework.nsw.gov.au/resource-library/lis > odes-oi racti

#### **Northern Territory**

Work Health and Safety (National Uniform Legislation) Act 2011

Work Health and Safety (National Uniform Legislation) Regulation 201

Legislation NT: https://worksafe.nt.gov.au/laws-and-compliance/wo\_place-

Codes of Practice NT: https://worksafe.nt.gov.au/f

#### South Australia

Work Health and Safety Act 2012 (SA)

Work Health and Safety Regulations 2012 (SA)

Legislation for SA: https://www.safework.sa.gov.au/resources/le\_lation

Codes of Practice for SA: <a href="https://www.safework.sa.gov.au/wor">https://www.safework.sa.gov.au/wor</a> aces/codes-of-practice#COPs

#### Tasmania

Work Health and Safety Act 2012

Work Health and Safety (Transitional and Consequential Provisions) Act 2012

Work Health and Safety Regulations 2012

Work Health and Safety (Transitional) Regulations 2012

Legislation for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations

Codes of Practice for TAS: https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice

Details of permits, licenses or access required by regulatory bodies (add or delete as required):

- Permits from local council
- Authorisation to commence work
- Any required documents.

#### Victoria

Occupational Health al. Safety Act

Occupational Health and Infety gulations 2017

Legis on VIC: https://www.wksafe.vic.gov.au/occupational-health-and-safety-act-and-

gulat

des on actice VI autros://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice

#### Western Australia

Work Health and Safety Act 2020

Work Health and Safety Regulations 2022

Legislation Western Australia: https://www.commerce.wa.gov.au/worksafe/legislation

Codes of Practice WA: https://www.commerce.wa.gov.au/worksafe/codes-practice

#### Safe Work Australia Links

Law and Regulation (All States): https://www.safeworkaustralia.gov.au/law-and-regulation Model Codes of Practice: https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice

#### **Model Codes of Practice**

- Managing noise and preventing hearing loss at work
- Confined spaces
- Labelling of workplace hazardous chemicals
- Managing risks of hazardous chemicals in the workplace
- Welding processes
- First aid in the workplace
- Managing the risk of falls at workplaces
- Hazardous manual tasks
- Managing the risk of falls in housing construction
- Managing electrical risks in the workplace
- Demolition work
- Excavation work
- Work health and safety consultation, cooperation and coordination
- Managing the work environment and facilities
- How to manage work health and safety risks
- Managing risks of plant in the workplace
- Construction work





#### SIGNATORIES OF THE SAFE WORK METHOD STATEMENT

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Signature	Date

#### SAFE WORK IN THE STATEMENT MONITORING AND REVIEW

The SWMS must be reviewed regularly to make sure it remains a fective of must be reviewed (and revised if necessary) if relevant control measures are revised. The view process should be carried out in consultation with workers (including contractors of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU mast ensure that advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a rest of the review are advised of the changes in a way that will enable them to implement their duties and the involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

The SWMS must be monitored regularly for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

- Spot Checks.
- 2. Consultation with workers, contractors and sub-contractors.
- 3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	1	2	3	4	5	6	7
NAME							
INITIALS							
DATE							

Version 2.5 Authorised by Review # Date of Issue: Review Date: 19





### SAFE WORK METHOD STATEMENT REVIEW CHECKLIST

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	COMMENTS
The company details have been entered, including the project name and address.		
All relevant personnel consulted during the development of the SWMS.		
Name, signature, position and date signed of the person approving the SWMS.		
Specific personnel and qualifications, experience is noted in the SWMS.	7	
Provides a step-by-step process of tasks required to carry out the activity or task.		
Adequate risk assessment of any identified hazards has been completed.		
Foreseeable hazards are identified and documented for each step.		
Any hazards listed in any site risk assessments have been added to the SWMS		
SWMS initial risk (IR) column as well as residual risk (RR) column mpleted.		
Check control measures added to the SWMS are the most effective selective.		
Responsible person is assigned and listed on the person is as a person is a pers		
Permit or licenses requirements specified, sur as Hot Work, Electric Work, Work at Heights etc.		
SWMS identifies plant and equipment to be us		
Details of inspection checks required for any equipment listed a noted on the SWMS.		
Describes any mandatory qualifications, experience, and or skills required to perform the work.		
Applicable personal protective equipment is selected on the SWMS.		
Reflects and documents any legislative references and/or Australian Standards.		
Identifies any hazardous substances used with specific control measures in line with any SDS.		
REVIEWED BY	DATE REVIE	WED
SIGNATURE	DATE COMPL	ETED